



The Open Chemical Engineering Journal

Content list available at: <https://openchemicalengineeringjournal.com>



REVIEW ARTICLE

A Review on CO₂ Absorption using Chemical Solvents at Low and High CO₂ Partial Pressure Conditions in a Packed Column

Hairul Nazirah Abdul Halim^{1,2,*}, Viga Rajiman¹ and Azmi Mohd Shariff³

¹Faculty of Chemical Engineering Technology, Universiti Malaysia Perlis, Kompleks Pusat Pengajian Jejawi 3, 02600 Arau, Perlis, Malaysia

²Centre of Excellence for Biomass Utilization, Universiti Malaysia Perlis, Kompleks Pusat Pengajian Jejawi 3, 02600 Arau, Perlis, Malaysia

³Department of Chemical Engineering, Universiti Teknologi PETRONAS, 32610 Bandar Seri Iskandar, Perak, Malaysia

Abstract:

CO₂ removal is important for industrial flue gas treatment, biogas enhancement, and natural gas (NG) processing applications. Chemical absorption using an amine-based solvent is a proven technology for CO₂ removal from various gases. In recent years, various promising amine solvents have been investigated, either as single or blended solutions, to enhance the CO₂ absorption process at low and high CO₂ partial pressure conditions. Low CO₂ partial pressures (1 – 47 kPa) have been utilized in numerous research works focusing on flue gas treatment and biogas enhancement applications. On the other hand, high CO₂ partial pressures were instead applied in NG processing ranging between 750 and 1600 kPa. To provide more insight into the current trends, existing research on CO₂ absorption in amine-based solvents is presented in this review focusing on absorption performance in a packed column at low and high CO₂ partial pressures. Reports on the effect of different parameters, namely CO₂ partial pressure, gas, and liquid flow rates, amine concentrations, and liquid temperature, on the removal of CO₂ in the packed column are included. Based on the review, the future direction is further highlighted in this area.

Keywords: CO₂ capture, Amine solvent, Flue gas, Biogas, Natural gas, Chemical absorption.

Article History

Received: October 13, 2021

Revised: November 16, 2021

Accepted: January 18, 2022

1. INTRODUCTION

Carbon dioxide (CO₂) exists as one of the contaminants in the industrial flue gas. Approximately 80% of the total greenhouse gas emissions are contributed by CO₂ and, therefore, it acts as the main contributor to global warming and resultant climate changes [1]. Major industrial flue gas sources contribute to CO₂ emissions from industrial activities, including coal-fired power plants and natural gas burning, cement industries, and petrochemical, iron, and steel refineries. CO₂ emissions are mostly formed by the combustion of fossil fuels [2]. The CO₂ contents in flue gas streams are generally between 3 to 15 vol.%, depending on the types of fossil fuels used [3]. The CO₂ content in the flue gas of power plants powered by coal needs to be reduced to less than 1.5% of CO₂ concentration, while NG power plants require a lower concentration of 0.5% CO₂. Thus, CO₂ capture technology plays an important role in removing CO₂ contaminants before the treated flue gas can be released into the atmosphere.

Meanwhile, renewable energies, such as biogas, primarily consist of methane (CH₄) (40–75 vol.%), with impurities, such as CO₂ (15–60 vol.%) and trace gases of hydrogen (H₂), ammonia (NH₃), hydrogen sulfide (H₂S), water vapor (H₂O) and nitrogen (N₂) [4, 5]. The compositions of biogas vary depending on the organic substrates used in the anaerobic digestion process for biogas production [6]. Biogas upgrading is one of the essential processes of removing unwanted impurities, resulting in methane-rich biogas with high calorific value [6, 7]. The utilization of methane-rich biogas is mainly for power generation and vehicle fuel in transportation, replacing fossil fuel as an energy resource [9, 10].

On the other hand, CO₂ must be removed from raw natural gas (NG) at both onshore and offshore gas processing sites. Besides CO₂, the composition of raw NG is mainly CH₄, small portions of other hydrocarbons (C₂H₆, C₃H₈, and C₄H₁₀), and trace elements (N₂, O₂, and H₂S). The heating values of NG are reduced with a higher CO₂ presence in NG. Furthermore, CO₂ can increase the possibility of corrosion in pipelines and processing equipment when moisture is present. Hence, CO₂ removal is also an essential process to increase pipeline gas quality and achieve the required sales gas specifications for

* Address correspondence to this author at the Faculty of Chemical Engineering Technology, Universiti Malaysia Perlis, Kompleks Pusat Pengajian Jejawi 3, 02600 Arau, Perlis, Malaysia; Tel: +60 4 979 8840; Fax: +60 4 979 8751; E-mail: hairulnazirah@unimap.edu.my

marketing purposes [11]. CO₂ concentration must be decreased to less than 3% for pipeline sale gas specification, while the requirement for LNG feedstock is less than 50 ppm CO₂.

The process criteria and requirements applied to the flue gas, biogas, and NG applications have significantly different degrees of CO₂ removal, types of the feed gas, the design criteria of the process equipment, and the operating conditions. Table 1 compares the industrial flue gas treatment, biogas upgrading, and NG processing applications [12, 14].

A number of review articles comparing CO₂ capture technologies in terms of process performance and the use of various types of solvents for the removal process have been published. However, limited journals have provided an up-to-date review on mass transfer performance for CO₂ absorption into amine solutions in packed columns. Thus, this study presents the recent progress in CO₂ capture using chemical

absorption methods between high- and low-pressure conditions in a packed column. The advantage and disadvantages of the established CO₂ capture technologies are also systematically reviewed. Data used in this study were collected from SCOPUS, a global database that provides access to reliable data in various research fields. It is an analytical tool used to analyze, track, and visualize research trends. The publications from 2012 to 2020 on the mass transfer performance in terms of overall volumetric mass transfer coefficient, $K_G a_v$, for CO₂ absorption in a packed column written in English were reviewed.

1.2. CO₂ Capture Technologies

The conventional CO₂ capture technologies mainly include the process of absorption, adsorption and cryogenic, and membrane separations. In Table 2, the challenges in CO₂ capture technologies are summarized [14, 15].

Table 1. Comparison of process criteria and requirements between flue gas treatment, biogas upgrading, and natural gas processing applications.

Criteria	Flue Gas Treatment	Biogas Upgrading	Natural Gas Processing
Purpose of CO ₂ removal	To reduce CO ₂ emissions into the atmosphere	To produce methane-rich gas with high calorific value as an alternative fuel resource	To prevent corrosion in the gas pipelines and meet the requirement of pipeline gas quality and sales gas specifications
The concentration of CO ₂ in the feed gas	In general: 3 – 15% Power plant Coal-fired: 14% Natural gas turbine: 4%	In general: 13 – 50% The feedstock used for the biogas production resulted in different biogas compositions	Conventional gas: 1–10% CO ₂ -rich gas: > 10% Mix gas offshore: 30–50% of CO ₂
Gases present in the feed gas	CO ₂ , N ₂ , SO ₂ , O ₂	CH ₄ , C ₂ H ₆ , C ₃ H ₈ , CO ₂ , H ₂ , N ₂ , H ₂ S, O ₂ , H ₂ O	CH ₄ , C ₂ H ₆ , C ₃ H ₈ , C ₄ H ₁₀ , CO ₂ , O ₂ , N ₂ , H ₂ S
The pressure of feed gas	Atmospheric	Biogas can be collected and stored in a cylinder at various pressures. The critical pressure of biogas for liquefaction is 47.5 bar	High pressure of up to 200 bar (offshore condition)
Purity of the treated gas	Power plant Coal-fired: < 1.5% of CO ₂ Natural gas turbine: < 0.5% of CO ₂	Pipeline gas: < 3% CO ₂	Pipeline gas: < 3% of CO ₂ LNG feedstock: < 50 ppm CO ₂

Table 2. Advantages and disadvantages of CO₂ separation technologies.

CO ₂ Capture Technologies	Advantages	Disadvantages	Treated Gas (%)	Methane Loss (%)
Absorption	<ul style="list-style-type: none"> • Applicable for capturing low concentration of CO₂. • 95% recovery rate • Higher product purity 	<ul style="list-style-type: none"> • Absorbent loss • Degrades and corrodes equipment • Absorbent emission affects the environment. • Requires high absorber volume • High viscosity • High regeneration energy 	> 98	0.04–0.1
Adsorption	<ul style="list-style-type: none"> • Low energy regeneration • Low CO₂ recovery • Applicable for separating CO₂ and H₂S simultaneously 	<ul style="list-style-type: none"> • Difficulty in handling solid • Slow adsorption kinetics • Low CO₂ selectivity • Regeneration leads to thermal, chemical, and mechanical instability 	96–98	1–3.5

(Table 2) contd....

CO ₂ Capture Technologies	Advantages	Disadvantages	Treated Gas (%)	Methane Loss (%)
Membrane Separation	<ul style="list-style-type: none"> • A regeneration process is not required. • Low energy consumption • Waste streams are not required. • Simple modular system 	<ul style="list-style-type: none"> • Plugged membranes by impurities in the gas stream • Low permeation selectivity of CO₂ over other gases • Limitation on the operating temperature • Low CH₄ purity 	90–96	0.5–20
Cryogenic Separation	<ul style="list-style-type: none"> • Performing well at high pressures • Economically feasible at high CO₂ concentration • Low CH₄ losses 	<ul style="list-style-type: none"> • High regeneration energy requirement • Pre-treatment required to avoid blockages and before distillation • High capital cost 	99	0.5–3

The highest CO₂ removal efficiency was observed using cryogenic separation, which utilizes the process of cooling and condensation in separating CO₂ from the gas stream. However, the intensive energy requirement for cooling is of concern because it can increase the operating cost [15]. Meanwhile, the lowest performance in the CO₂ separation with the maximum removal of 96% was observed for membrane separation. The working principle of this technology uses a membrane as a permeable material [16] to separate CO₂ molecules. However, low membrane selectivity is the major limitation of this technology because the separation between CH₄ and CO₂ depends on the permeability properties of the membranes. Consequently, low membrane selectivity and permeability limitation can decrease CH₄ purity in treated gas. Besides, adsorption can also be performed by increasing the operating pressure, which would result in the gas being adsorbed and vice versa for the regeneration process. The performance of removing CO₂ from the stream also showed a promising result in the range of 96% to 98%. However, this process is complex and requires extensive control [17].

CO₂ capture can also be performed using physical and chemical absorptions. The working principle of physical scrubbing is applied based on Henry's Law, which states that

CO₂ is more soluble than CH₄ [18]. The absorption of CO₂ is done at high pressure and low pressure. In contrast, the regeneration process is performed by heating, pressure reduction, or both. For instance, the operation of the absorption process at high CO₂ partial pressures consequently leads to increased energy requirement for gas pressurization. In CO₂ removal using chemical absorption, it should be noted that CO₂ is more reactive than CH₄, whereby CO₂ reacts with the chemical solution in a counter-flow motion [10]. Based on the operating pressure, percentage of methane loss, and final purity of the treated gas, chemical absorption shows the best potential for removing CO₂ and other impurities from the gas stream.

Recently, the focus of studies has turned to enhancing the CO₂ capturing process by proposing a new or promising blended solvent. Studies were also conducted under different operating conditions, aiming to enhance the absorption performance. Until now, the number of research publications for the CO₂ capturing field has been growing, which provides high-quality data required for further development and design of the CO₂ absorption process. Table 3 shows the top-listed authors who contributed to the CO₂ capture field from 2010 until now.

Table 3. The top 15 main authors who contributed to the CO₂ capture research field.

Authors	Affiliation	Publications
Svendsen, Hallvard Fjøsne	Norges Teknisk-Naturvitenskapelige Universitet, Department of Chemical Engineering, Trondheim, Norway	96
Tontiwachwuthikul, P. Paitoon	Clean Energy Technologies Research Institute, Faculty of Engineering and Applied Science, Regina, Canada	82
Rochelle, Gary Thomas	The University of Texas, Austin, United States	72
Liang, Zhiwu	Hunan University, Joint International Center for CO ₂ Capture and Storage (iCCS), Changsha, China	70
Idem, Raphael O.	The University of Regina, Department of Industrial and Systems Engineering, Regina, Canada	69
Yu, Hai	CSIRO Energy, Mayfield, Australia	60
Gao, Hongxia	Hunan University, Department of Chemical Engineering, Changsha, China	56
Hanson, Ronald	Stanford University, Palo Alto, United States	55
Fang, Mengxiang	State Key Laboratory of Clean Energy Utilization, Hangzhou, China	51
Puxty, Graeme Douglas	CSIRO Energy, Newcastle, Australia	49
Mohd Shariff, Azmi	Universiti Teknologi PETRONAS, Seri Iskandar, Malaysia	49
Feron, Paul	CSIRO Energy, Newcastle, Australia	47
Knuutila, Hanna K.	Norges Teknisk-Naturvitenskapelige Universitet, Trondheim, Norway	47
Luo, Xiao	Hunan University, Provincial Hunan Key Laboratory for Cost-effective Utilization of Fossil Fuels Aimed at Reducing Carbon-dioxide Emissions, Changsha, China	45
Chen, Jian	Tsinghua University, Department of Chemical Engineering, Beijing, China	43

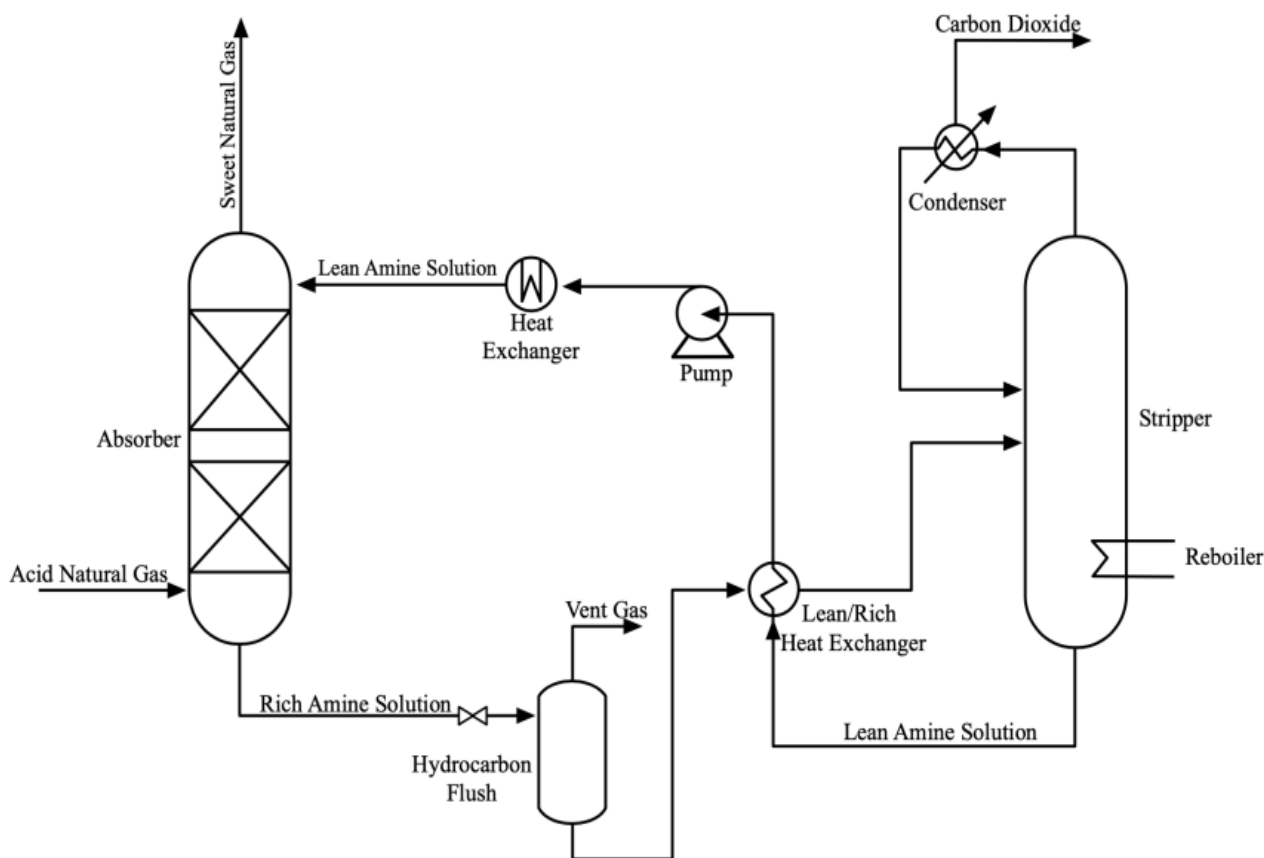


Fig. (1). General schematic diagram of CO₂ absorption plant [20].

Their research articles were mostly published in top academic journals. Across a timeline from 2010 until now, the International Journal of Greenhouse Gas Control is the first most popular source, with 516 research articles focusing on carbon capture and usage and storage (CCUS) technology specifically. The second most popular journal is Industrial and Engineering Chemistry Research, with 314 research articles. It is followed by the third most popular journal, Chemical Engineering Journal, with 246 research articles. The following section further reviews recent research on CO₂ capture, focusing on chemical absorption at high and low operating conditions in packed columns.

1.3. Capturing CO₂ using Chemical Absorption

Chemical absorption is the preferred technology for capturing CO₂ because this system effectively removes CO₂ from the desired target. The gas-liquid contacting schemes used in industrial CO₂ absorption systems are dominated by packed columns [19]. The diagram shown in Fig. (1) [20] is a general process flow for CO₂ absorption in a natural gas processing plant using an amine-based solvent. The process can generally be distinguished into two separate sections: i) the absorption section where the liquid solvent is used, and CO₂ within a gas stream is removed, and ii) a stripping section involving a regenerator to capture CO₂ from the solvent.

The gas stream that consists of CO₂ and NG is passed upwards into the absorber, where it flows counter-currently and comes into contact with the amine absorbent flowing from the

column's top. Upon contact, CO₂ molecules in the gas stream will migrate to the solvent in the liquid stream. The CO₂-rich solvent is collected at the bottom of the absorption column and passed into the stripper. Upon completing the regeneration process, the lean (low CO₂ content) solvent is recovered from the stripping section and returned to the absorption column to be reused in the continuous absorption process.

1.4. Chemical Absorption using Amine-Based Solvents

Amine-based solvents are the most common absorbents used in the chemical absorption process. There are different groups of amines that can be classified based on their chemical structures, which are primary, secondary, and tertiary. The replacement of hydrogen atoms with alkyl or aryl groups in the ammonia molecule differentiates between the amines.


1.4.1. Primary, Secondary, and Tertiary Amines

Primary alkanolamines (*e.g.*, monoethanolamine (MEA)) are conventional amines that have been widely used for the application of CO₂ removal owing to their high reactivity with CO₂ [21]. The reactivity of alkanolamines reduces as the number of hydrogen atoms decreases in the amine structures while the absorption capacity increases. Based on stoichiometry, the CO₂ loading capacity of primary amines is 0.5 mol of CO₂/mol of amine [22]. It requires high energy for regeneration and is more corrosive compared to other groups of amines.

Diethanolamine (DEA) and diisopropanolamine (DIPA)

are secondary amines which exhibit less reactivity in CO₂ absorption and have lower heat of reaction. These solvents are less corrosive to the processing equipment and require less energy for regeneration than primary amines.

Based on Caplow's [23] studies, as per the zwitterion mechanism, CO₂ can be absorbed into primary and secondary amines based on the following reactions:



Where R₂NH represents the group that was previously attached to the amine group, while B represents a base molecule. Two essential steps of the mechanism include formation of CO₂-amine zwitterion (carbamate) as an intermediate product (R1), followed by base-catalyzed deprotonation of this zwitterion (R2). When a base, such as RNH₂, H₂O, and OH⁻, is in the solution, it will catalyze the deprotonation of zwitterion [24].

Tertiary alkanolamines, such as methyldiethanolamine (MDEA) and triethanolamine (TEA), have slower reactivity with CO₂ than the other groups of alkanolamines. However, the advantages of tertiary alkanolamines are high stoichiometric loading capacity, which is double the value of the primary amine group with 1 mol of CO₂ /mol of amine [25], lower energy requirements for solvent regeneration [26], and lower corrosiveness to the processing equipment [27]. The following reaction between CO₂ and a tertiary amine can produce bicarbonate ions;



1.4.2. Sterically Hindered Amine

Sterically hindered amine (SHA) is a chemical compound with a bulky alkyl group attached to the amino group, which provides a steric hindrance to the reaction with CO₂. Fig. (2) shows several types of sterically hindered amine structures. The steric group slows down the overall reaction, resulting in less stable carbamate production as an intermediate product. The SHA carbamates then undergo hydrolysis to form bicarbonate and release free amines for different reactions. Thus, the reaction between CO₂ molecules and free amine

molecules will increase the CO₂ loading capacity of 1 mol of CO₂/mol of amine [28]. Since SHA forms unstable carbamates, the regeneration energy used to absorb CO₂ is lower than primary and secondary amines [29 - 31].

The use of SHA as an absorbent for acid gas removal was reported by EXXON Research and Engineering Company [28]. A type of SHA, 2-amino-2-methyl-1-propanol (AMP), received much attention from researchers due to its desirable characteristics as an absorbent for CO₂ absorption. AMP was reported to have better properties compared with MEA, such as higher CO₂ absorption capacity at 1.0 mol of CO₂/mol of amine, lower energy required for the regeneration process [29, 30, 32, 33], and being more resistant to thermal degradation [29].

1.4.3. Activators

An activator is a reactive compound that reacts with CO₂ with high reactivity. The blend of activators with amines can substantially solve the slow reactivity problem of several amine-based solvents. Cyclic amines were identified to have a higher prospect as the potential compound for CO₂ capture because they show excellent performance with a greater CO₂ absorption rate and capacity [34]. Several cyclic amines, such as piperazine (PZ), 2-(1-piperazinyl)-ethylamine (PZEA), morpholine (MORPH), and piperidine (PD), were reported to be activators in tertiary amine and SHA solvents for CO₂ absorption.

PZ is the most common activator used in the activated MDEA technology of BASF. Due to the structure of cyclic and diamine of PZ, it exhibits a higher reaction rate than the primary and secondary amines [35]. It is a fast activator whose reaction rate constant is higher than MEA [35, 36]. As a secondary diamine, PZ can form dicarbamate, deprotonate, or a combination of the two [37]. Due to its solubility limitation in water, most studies use PZ as a promoter in small weight increments ranging from 1 to 10 wt.% [38]; for example, to enhance tertiary amine and SHA for CO₂ absorption.

Other than that, 2-(ethylamino)ethanol (EAE), a sterically hindered secondary alkanolamine, has also been explored as an activator [39 - 42]. Fig. (3) depicts the molecular structure of EAE. Based on previous literature, EAE has shown excellent characteristics of CO₂ absorption, such as higher absorption capacity compared to MEA solvent [41, 43, 44] and low energy consumption [40, 41, 44].

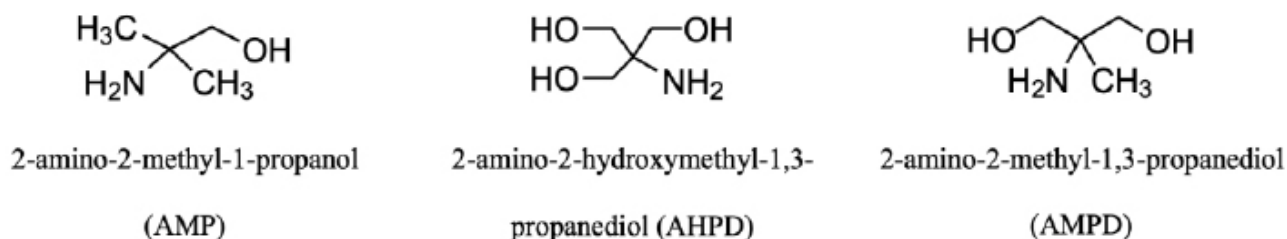


Fig. (2). Several types of sterically hindered amine structures.




Fig. (3). Molecular structure of EAE.




Fig. (4). Molecular structure of AEEA.

Besides, 2-((2-Aminoethyl) amino) ethanol (AEEA) is a diamine compound with a molecular structure consisting of primary and secondary amine groups. The molecular structure of AEEA is shown in Fig. (4). This diamine is one of the alternative activators that can potentially increase the absorption rate [45 - 47]. The high absorption capacity for CO₂ can be observed using AEEA due to its CO₂ loading capacity of 2 mol of CO₂/mol of AEEA [47]. In the experimental studies by Zoghi *et al.* [46], CO₂ absorption was observed for different activators (AEEA, AMP, DGA, DIPA, and PZ) added to the MDEA solvent. MDEA activated by AEEA exhibited the best CO₂ absorption performance. Besides, they also reported the absorption performance to be influenced by the activator concentration. Thus, the molar ratio of the blended solvents is a significant factor that needs to be considered to enhance the CO₂ absorption process.

1.4.4. Current Research Trends in Amine-Based Solvents

As mentioned in the previous sections, some single amines have shown remarkable performances and have been industrially accepted for the CO₂ removal process. However, these solvents have limitations that need to be considered, such as low CO₂ loading capacity and highly corrosive nature that can degrade equipment. Due to this, researchers have been focused on finding new alternative solvents that can be used as ideal solvents.

Numerous studies of blended amines as absorbents can be found in the literature to enhance the absorption process. Two or more groups of amine solvents were blended to complement each other by correcting the drawback of each single amine solvent. In most literature studies, the performances of blended amine solvents were reported to be superior compared to single amine solvents used in the CO₂ removal process [48 - 51].

Moreover, one of the important developments in alkanolamine technology is the use of activators in aqueous alkanolamine solution to enhance the overall CO₂ absorption rate [52]. There is recent interest in using an activator that has shown increments in the absorption performance. The advantages of each solvent complement each other to achieve the characteristic of an ideal solvent. Additionally, Jiang *et al.*

[53] successfully proved the improvement of CO₂ capture in a coal-fired power plant in terms of process performance and operational cost. Although the increase in heat duty was slightly observed from 3.54 GJ/ton (90% efficiency) to 3.82 GJ/ton CO₂ (for 99.7% efficiency), better economic performance with CO₂ was proven to avoid the cost of \$64.1–64.8/tonne CO₂, which is only \$0.2–0.7/tonne CO₂ higher than 90% efficiency. Based on previous experimental studies, the solvent activated by PZ has proven to increase the CO₂ removal efficiency [52, 54 - 63]. The role of PZ as a rate activator is significantly important in elevating the reaction rate with CO₂. Recently, the performances of other potential activators have also been explored, such as the addition of AEEA and EAE to form a blended solution for the CO₂ removal process [40, 45, 64 - 66].

Active research development summary related to the field of CO₂ absorption is given in Table 4. Current research studies cover a broad range of topics, such as physical properties [56, 67 - 69], CO₂ solubility [39, 45, 54, 57, 58, 61, 67, 70], kinetic reaction [40, 60, 55] and mass transfer studies in a gas liquid contactor [39, 44, 67, 70 - 73]. The processes were evaluated on lab scale [39, 40, 45, 54, 61, 68 - 72] and pilot scale [59, 74] at atmospheric conditions considering flue gas treatment. Only a few works studied the physical properties of CO₂ solubility [56, 57, 75] and mass transfer [76 - 80] conducted at high pressure conditions.

1.5. Mass Transfer in a Packed Absorption Column

A packed absorption column is a gas-liquid contactor packed with structured or random packing. It is one of the mass transfer unit operations in which the behavior of the process is influenced by the mass transfer, thermodynamics, kinetics, and hydrodynamics in the packed column. In separation processes, the diffusion rate in both phases usually affects the total mass transfer rate. Fig. (5) shows the straight mass transfer (without chemical reaction) explained by the two-film theory, in which a gas-liquid interface is present between the gas and liquid films. The components pass through the gas and liquid films with molecular diffusion through each film, which is the controlling factor in the mass transfer process.

Table 4. Summary of previous research studies on CO₂ absorption using different blended solutions.

Solvent	Process Equipment	Process Conditions	Process Performance Studies	Ref.
PZ+AMP	Packed column Wetted wall column	$P_{CO_2} = 10 - 15$ kPa $T = 298 - 308$ K $P_{CO_2} = 5 - 15$ kPa $T = 298 - 313$ K	Regeneration performances, specific absorption rate, CO ₂ loading capacity, and CO ₂ absorption (%) Kinetic (reaction rate)	Khan <i>et al.</i> [54], Khan <i>et al.</i> [55],
PZ+AMP	Densitometer, Viscometer, Refractometer Stirred cell	$T = 298 - 333$ K P_{Total} up to 6.06 MPa $T = 298 - 333$ K	Physical properties Solubility studies	Murshid <i>et al.</i> [56] Murshid <i>et al.</i> [57]
PZ+AMP	Wetted-wall column	$P_{CO_2} = 18.03 - 72.52$ kPa $T = 293.15 - 323.15$ K	CO ₂ solubility, CO ₂ loading capacity	Mojtaba & Alireza [58]
PZ+AMP	Absorption column (pilot scale)	$P_{CO_2} = 11 - 13$ kPa $T = 313$ K	Pilot-scale performance (CO ₂ recovery, mass transfer coefficient, reboiler heat duty)	Artanto <i>et al.</i> [59]
PZ+AMP	Stopped flow equipment	$P_{CO_2} = 0 - 20$ kPa $T = 298 - 313$ K	Kinetic (reaction rate constant)	Sodiq <i>et al.</i> [60]
PZ+MDEA	Packed column	$P_{CO_2} = 10 - 15$ kPa $T = 298 - 313$ K	Regeneration efficacy, specific absorption rate, CO ₂ loading capacity and CO ₂ absorption (%)	Khan <i>et al.</i> [61]
PZ+MDEA	Packed column	$P_{CO_2} = 10 - 15$ kPa $T = 313.15$ K	Mass transfer and liquid hold-up correlations	Hemmati <i>et al.</i> [71]
PZ+DEEA	Hollow fiber membrane contactor	$P_{CO_2} = 10 - 20$ kPa $T = 298.15 - 318.15$ K	Mass transfer performance	Gao <i>et al.</i> [72]
MEA+IDMA2P	Stirred cell Equilibrium CO ₂ solubility measurement set up Packed column	$P_{Total} = 3$ kPa $T = 286.18 - 323.23$ K $P_{CO_2} = 2 - 100$ kPa $T = 293.15 - 333.15$ K $P_{CO_2} = 12 - 20$ kPa $T = 293.15 - 333.15$ K	CO ₂ solubility, equilibrium CO ₂ solubility and mass transfer performance	Ling <i>et al.</i> [67]
DEEA+MEA	Equilibrium CO ₂ solubility measurement set up Packed column	$P_{CO_2} = 6 - 100$ kPa $T = 303.15 - 343.15$ K $P_{CO_2} = 6 - 18$ kPa $T = 303.15 - 343.15$ K	Mass transfer performance, equilibrium CO ₂ solubility	Liao <i>et al.</i> [70]
EAE+3DMA1P	Stirred cell Tray tower	$P_{Total} = 101$ kPa $T = 303.2 - 323.2$ K CO_2 inlet = 15% $P_{Total} = 101$ kPa $T = 303.2 - 323.2$ K	CO ₂ loading capacity, CO ₂ removal (%)	Fu <i>et al.</i> [39]
DMEA+MEA	Hollow fiber membrane contactor	$P_{CO_2} = 10 - 20$ kPa $T = 298.15 - 318.15$ K	Mass transfer performance, molar ratio	Zhang <i>et al.</i> [73]
EAE+1DMA2P	Stopped-flow technique	$T = 298.15 - 318.15$ K	Kinetic (reaction rate constant)	Gao <i>et al.</i> [40]
AEEA+HMPD	CO ₂ solubility and absorption rate measurement set up	$P_{CO_2} = 28 - 1980$ kPa $T = 303.15 - 375.15$ K	CO ₂ solubility and absorption rate	Maleki & Motahari [45]

This theory assumes that the overall resistance to mass transfer achieves equilibrium, which can be calculated by adding the resistance at the interface of each phase, as shown in Eq. (1) [82]:

$$\frac{1}{K_y a_v} = \frac{1}{k_y a_v} + \frac{m}{k_x a_v} \quad (1)$$

Where K_y is the overall mass transfer coefficient in the gas phase, a_v is the effective mass transfer area of the packing, and m is the slope of the equilibrium curve. The term $1/K_y a_v$ is the overall mass transfer resistance, while $1/k_y a_v$ and $m/k_x a_v$ represent the resistance in the gas and liquid films, respectively.

For CO₂ absorption into a chemical solvent, the reaction occurs when CO₂ in the gas stream diffuses into the liquid stream. Consequently, the resistances of the mass transfer and chemical reaction steps need to be included in the overall expression of the mass transfer rate [82]. The two-film theory

is commonly used to describe the diffusion and chemical reactions between phases [82]. Eq. (2) expresses the correlation between the overall volumetric gas-film coefficient based on a partial pressure driving force ($K_G a_v$) and the coefficients of each phase. This correlation is followed by related chemical reactions that are expressed as a function of the enhancement factor (E):

$$\frac{1}{K_G a_v} = \frac{1}{k_G a_v} + \frac{H}{E k_L a_v} \quad (2)$$

Where $k_G a_v$ represents the individual volumetric mass transfer coefficient for the gas based on the partial pressure driving force, H is Henry's law coefficient and $k_L a_v$ is the liquid phase mass transfer coefficient without chemical reactions. E is the value of mass transfer flux with chemical reaction divided by the mass transfer flux without chemical reaction. $K_G a_v$ and $K_y a_v$ are related via $K_G a_v = K_y a_v / P$, where P is the total pressure inside the absorption column.

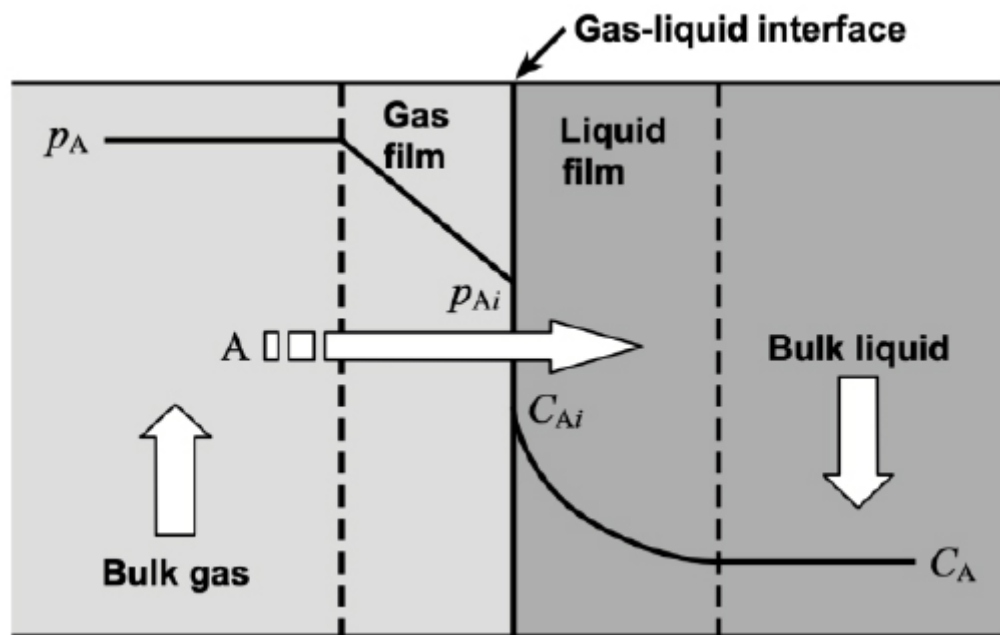


Fig. (5). The two-film theory of a non-chemical reaction [81].

1.5.1. Determination of Overall Mass Transfer Coefficient for Dilute CO₂ Concentrations in the Feed Gas

Generally, a gas mixture in the form of solute (CO₂) and inert gas goes into the inlet at the bottom of the absorption column. A decrease in gas flow rate is expected as the gas flows through the column and encounters CO₂ molecules in the gas phase, which shift into the liquid phase during the absorption process. If the bulk gas contains less than 10% of CO₂, changes in the total gas flow rate and liquid flow rate during the absorption process are usually ignored due to insignificant changes in both flow rates [82].

$K_G a_v$ for dilute gas with low CO₂ content (< 10% CO₂) in the gas stream is calculated as follows [82]:

$$K_G a_v = \frac{V/S}{PZ_T} \ln \frac{y_b}{y_a} \quad (3)$$

Where V is the total gas flow rate, S is the cross-section area of the absorption column, and Z_T is the packing height in the column. Meanwhile, y_a and y_b are the CO₂ mole fractions at the outlet and inlet of the column, respectively.

1.5.2. Determination of Overall Mass Transfer Coefficient for High CO₂ Concentrations in the Feed Gas

When CO₂ concentrations are high in the binary gas mixture, changes in the flow rates during the operation must be considered. For higher than 10% of CO₂ concentration, the material balance for the changes in the total gas and liquid flow rates in the column must be accounted for [82]. Any change in the total gas flow rate would be significant due to the inert gas concentration that varies between 10% to 90% as it flows from the bottom to the top of the column. Due to the significant decrease in the gas flow rate, the value of the gas flow rate is

averaged ($\overline{V/S}$), which results in average $\overline{K_G a_v}$, as shown in the following equation:

$$\overline{K_G a_v} = \frac{\overline{V/S}}{PZ_T} \ln \frac{y_b}{y_a} \quad (4)$$

1.6. Influence of Process Parameters on Process Performance in the Packed Absorption Column

A summary of previous research that used different types of single amine and blended amine solvents for CO₂ absorption conducted in packed absorption columns is shown in Table 5. It can be observed that the studies were conducted using different sizes of absorption columns, types of packing, and process conditions. In addition, all studies reported the effect of different parameters in the packed absorption column, for example, CO₂ partial pressure, the total flow rate of gas and liquid, amine concentration, and inlet liquid temperature. The previous studies summarized in Table 5 are further discussed in the following subsections.

1.6.1. CO₂ Partial Pressure in the Feed Gas

CO₂ partial pressure (P_{CO_2}) in the column can be achieved by manipulating the total pressure in the column (P_T) and the desired CO₂ concentration in the feed gas (y_{CO_2}). The relationship is shown in the following equation:

$$P_{CO_2} = y_{CO_2} \times P_T \quad (5)$$

Theoretically, the increase in CO₂ partial pressure resulted in higher amounts of CO₂ molecules reacting with limited free active amines in the liquid phase. This condition created high resistance in the liquid phase, which consequently reduced the CO₂ removal efficiency and the value of $K_G a_v$. For simulated

flue gas treatment, most of the studies were performed in the range of 1 – 20 kPa in PZ + AMP [54], PZ + MDEA [61], MEA + 1DMA2P [67], DEEA + MEA [70], MEA + MeOH [74], MDEA + MEA [83], DETA [87], DEEA [90], MEA +

MeOH [91], MEA [95], and MEA + AMP [96]. The operations are categorized as low CO₂ partial pressure conditions, in which all studies reported the reduction of K_{Ga} with increasing CO₂ partial pressure of up to 20 kPa.

Table 5. Various types of solvents, size of packed absorption column, and process parameters for CO₂ absorption from chemical solvents.

Solvents	Characteristics of Packed Column	Process Parameters	Ref.
MDEA + MEA	ID = 0.275 m H = 2.15 m Packing: DX structured packing	$G = 15.99 - 18.65 \text{ kmol/m}^2 \cdot \text{hr}$ $L = 2.8 - 5.0 \text{ m}^3/\text{m}^2 \cdot \text{hr}$ $P_{CO_2} = 0 - 15 \text{ kPa}$ [MDEA/MEA] = 27/3, 25/5 and 23/7 wt.% $T = 294 - 318 \text{ K}$ $CO_2 \text{ loading} = 0.05 - 0.28$	Sema <i>et al.</i> [83]
MDEA + MPDA AMP + MPDA	ID = 0.125 m Packing: Mellapak 250.Y Packing height: 4.2 m	$G = 30 - 110 \text{ kg/hr}$ $L = 4 - 28.5 \text{ m}^3/\text{m}^2 \cdot \text{hr}$ $P_{CO_2} = 35 - 135 \text{ mbar}$ $T = 313 \text{ K}$ $CO_2 \text{ loading} = 0.179 - 0.213$	Mangala-pally <i>et al.</i> [84]
DETA	ID = 0.024 m Packing: Dixon ring Packing height: 1.40 m	$G = 28.78 - 46.62 \text{ kmol/m}^2 \cdot \text{hr}$ $L = 3.98 \text{ m}^3/\text{m}^2 \cdot \text{hr}$ $P_{CO_2} = 14.8 - 15.3 \text{ kPa}$ [Amine] = 2.0 kmol/m ³ $T = 303 \text{ K}$ $CO_2 \text{ loading} = 0.179 - 0.213$	Fu <i>et al.</i> [85]
MEA	ID = 0.024 m Packing: Dixon ring Packing height: 1.4 m	$G = 24.98 - 39.45 \text{ kmol/m}^2 \cdot \text{hr}$ $L = 3.98 \text{ m}^3/\text{m}^2 \cdot \text{hr}$ $P_{CO_2} = 15.1 - 15.8 \text{ kPa}$ [Amine] = 2.0 kmol/m ³ $T = 303 \text{ K}$ $CO_2 \text{ loading} = 0.179 - 0.213$	Fu <i>et al.</i> [85]
DEAB MEA MDEA	ID = 0.275 m H = 2.15 m Packing: DX structured packing	$G = 17.85 \text{ kmol/m}^2 \cdot \text{hr}$ $L = 4.0 - 7.0 \text{ m}^3/\text{m}^2 \cdot \text{hr}$ $P_{CO_2} = 9.0 \text{ kPa}$ [Amine] = 2.0 kmol/m ³ $T = 296.35 \text{ K}$ $CO_2 \text{ loading} = 0.14$	Naami <i>et al.</i> [86]
DETA	ID = 0.028 m H = 1.7 m Packing: DX structured packing Packing height: 1.2 m	$G = 22.2 - 40.4 \text{ kmol/m}^2 \cdot \text{hr}$ $L = 1.95 - 4.87 \text{ m}^3/\text{m}^2 \cdot \text{hr}$ $P_{CO_2} = 14.8 - 15.3 \text{ kPa}$ [Amine] = 1.0 – 3.0 kmol/m ³ $T = 303.15 - 323.15 \text{ K}$ $CO_2 \text{ loading} = 0.184 - 0.826$	Fu <i>et al.</i> [87]
MEA	ID = 0.211 m H = 9.4 m Packing: Pall rings Packing height: 2.7 m	$G = 100 - 140 \text{ m}^3/\text{hr}$ $L = 0.24 - 0.42 \text{ m}^3/\text{hr}$ $P_{CO_2} = 10 - 11 \text{ kPa}$ [MEA] = 30 wt.% $T = 313.15 \text{ K}$	Artanto <i>et al.</i> [88]
PZ+AMP	ID = 0.211 m H = 9.4 m Packing: Pall rings Packing height: 2.7 m	$G = 100 - 140 \text{ m}^3/\text{hr}$ $L = 0.24 - 0.54 \text{ m}^3/\text{hr}$ $P_{CO_2} = 11 - 13 \text{ kPa}$ [AMP/PZ] = 25/5 wt.% $T = 313.15 \text{ K}$	Artanto <i>et al.</i> [59]
MEA AMP	ID = 0.04 m H = 1.30 m Packing: nonreactive metal HELI-PAK	$G = 0.005 - 0.008 \text{ m}^3/\text{min}$ $L = 0.00015 - 0.0003 \text{ m}^3/\text{min}$ $P_{CO_2} = 10.64 - 12.66 \text{ kPa}$ [Amine] = 1, 2, 3 kmol/m ³ $T = 303 \text{ K}$	Khan <i>et al.</i> [89]

Solvents	Characteristics of Packed Column	Process Parameters	Ref.
PZ+AMP	ID = 0.04 m H = 1.3 m Packing: nonreactive metal HELI-PAK	$G = 0.005 - 0.008 \text{ m}^3/\text{min}$ $L = 0.00015 - 0.0003 \text{ m}^3/\text{min}$ $P_{CO_2} = 10 - 15 \text{ kPa}$ [AMP/PZ] = 28/2, 25/5, 22/8, 20/10 wt.% $T = 298 - 308 \text{ K}$	Khan et al. [54]
PZ+MDEA	ID = 0.04 m H = 1.3 m Packing: nonreactive metal HELI-PAK	$G = 0.005 - 0.008 \text{ m}^3/\text{min}$ $L = 0.00015 - 0.0003 \text{ m}^3/\text{min}$ $P_{CO_2} = 10 - 15 \text{ kPa}$ [AMP/PZ] = 28/2, 25/5, 22/8, 20/10 wt.% $T = 298 - 308 \text{ K}$	Khan et al. [61]
MEA+1DMA2P	ID = 0.028 m H = 1.7 m Packing: Sulzer DX structured packing Packing height: 1.25 m	$G = 33.49 - 48.07 \text{ kmol}/\text{m}^2 \cdot \text{hr}$ $L = 2.92 - 5.85 \text{ m}^3/\text{m}^2 \cdot \text{hr}$ $P_{CO_2} = 12 - 20 \text{ kPa}$ $T = 293.15 - 333.15 \text{ K}$ $\text{CO}_2 \text{ loading} = 0.20 - 0.44$	Ling et al. [67]
DEEA	ID = 0.028 m H = 1.70 m Packing: Sulzer DX structured packing Packing height: 1.25 m	$G = 30.50 - 43.52 \text{ kmol}/\text{m}^2 \cdot \text{hr}$ $L = 3.9 - 11.7 \text{ m}^3/\text{m}^2 \cdot \text{hr}$ $P_{CO_2} = 3 - 15 \text{ kPa}$ [Amine] = 1 - 4 kmol/m ³ $T = 293.15 - 333.15 \text{ K}$ $\text{CO}_2 \text{ loading} = 0.05 - 0.20$	Xu et al. [90]
DEEA+MEA	ID = 0.028 m Packing: Sulzer DX structured packing Packing height: 1.25 m	$G = 30.47 - 47.87 \text{ kmol}/\text{m}^2 \cdot \text{hr}$ $L = 3.9 - 11.7 \text{ m}^3/\text{m}^2 \cdot \text{hr}$ $P_{CO_2} = 6 - 18 \text{ kPa}$ [Amine] = 2 - 5 kmol/m ³ $T = 303.15 - 343.15 \text{ K}$ $\text{CO}_2 \text{ loading} = 0.15 - 0.35$	Liao et al. [70]
MEA+MeOH	H = 2.5 m Packing: Sulzer packing 500 BX Pall rings packing Mellapale packing 500Y Packing height: 1.1 m and 0.9 m (two packed section)	$G = 3 - 5 \text{ m}^3/\text{hr}$ $L = 30, 40 \text{ L}/\text{hr}$ $T = 293.15 \text{ K}$ [CO ₂] = 15 vol.%	Gao et al. [74]
MEA+MeOH	ID = 0.028 m H = 1.7 m Packing: DX structured packing Packing height: 1.25 m	$G = 24.37 - 63.54 \text{ kmol}/\text{m}^2 \cdot \text{hr}$ $L = 2.92 - 16.09 \text{ m}^3/\text{m}^2 \cdot \text{hr}$ $P_{CO_2} = 6.7 - 13.8 \text{ kPa}$ [Amine] = 2.5 - 5 kmol/m ³ $T = 283.15 \text{ K}$ $\text{CO}_2 \text{ loading} = 0 - 0.373$	Fu et al. [91]
1DMA2P, MEA, MDEA	ID = 0.028 m H = 1.7 m Packing: DX structured packing Packing height: 1.25 m	$G = 28.02 \text{ kmol}/\text{m}^2 \cdot \text{hr}$ $L = 4.87 \text{ m}^3/\text{m}^2 \cdot \text{hr}$ $P_{CO_2} = 13.2 - 13.6 \text{ kPa}$ [Amine] = 2 kmol/m ³ $T = 313 \text{ K}$	Liang et al. [92]
MEA	ID = 0.046 m H = 2.04 m Packing: Sulzer metal gauze packing	$G = 18.89 - 35.08 \text{ kmol}/\text{m}^2 \cdot \text{hr}$ $L = 3.0 - 7.5 \text{ L}/\text{hr}$ [CO ₂] = 20% $P_{CO_2} = 1000 \text{ kPa}$ [Amine] = 1.0 - 4.0 kmol/m ³ $T = 300 - 318 \text{ K}$ Operating pressure = 5.0 MPa	Halim et al. [93]
PZ+AMP	ID = 0.046 m H = 2.04 m Packing: Sulzer metal gauze packing	$G = 33 - 51 \text{ kmol}/\text{m}^2 \cdot \text{hr}$ $L = 2.89 - 3.97 \text{ m}^3/\text{m}^2 \cdot \text{hr}$ [CO ₂] = 40 vol.% [AMP/PZ] = 23/7 wt.% $T = 303 - 318 \text{ K}$ Operating pressure = 0.1 - 4.0 MPa $P_{CO_2} = 40 - 1600 \text{ kPa}$	Hairul et al. [79]

Solvents	Characteristics of Packed Column	Process Parameters	Ref.
PZ+AMP	ID = 0.046 m H = 2.04 m Packing: Sulzer metal gauze packing	$G = 33 - 51 \text{ kmol/m}^2\cdot\text{hr}$ $L = 2.89 - 4.33 \text{ m}^3/\text{m}^2\cdot\text{hr}$ [CO ₂] = 30 - 50% $P_{CO_2} = 1212 \text{ kPa} - 2020 \text{ kPa}$ [AMP/PZ] = 20, 30, 40, and 50 wt.% $T = 303 - 318 \text{ K}$ Operating pressure = 0.1 - 5.0 MPa	Hairul <i>et al.</i> [77]
MEA+NMP	ID = 0.145 m Packing height: 1.0 m Packing: FLEXIPAC 1Y structured packing	$G = 100 \text{ SLPM}$ $L = 1.0 \text{ L/min}$ [CO ₂] = 50% [NMP/MEA] = 40/20 wt.% Operating pressure = 0.1 - 5.0 MPa $P_{CO_2} = 50 - 2500 \text{ kPa}$	Tan <i>et al.</i> [94]

(Nomenclature: ID = internal diameter, H = column height, G = total gas flow rate, L = liquid flow rate, P_{CO_2} = CO₂ partial pressure, T = inlet temperature of the liquid).

Meanwhile, NG processing requires a high-pressure operation of up to 5.0 MPa, which requires high CO₂ partial pressure conditions. Several studies were conducted using CO₂-rich NG in the range of 20% to 75% of CO₂ for NG processing applications [77, 79, 93, 94]. It was observed that different experimental designs resulted in different observations at high CO₂ partial pressures. Since CO₂ partial pressure can be achieved by manipulating one of the factors in Equation 5, the effect of CO₂ concentration and operating pressure has been reported in previous studies. Although both studies resulted in various ranges of CO₂ partial pressure, they also changed the CO₂ gas flow rate (G_{CO_2}) of the system. Significant trend in CO₂ removal efficiency was reported by Hairul *et al.* [78], Halim *et al.* [79], and Tan *et al.* [94].

Hairul *et al.* [78] studied CO₂ absorption using feed gas consisting of 30% to 50% CO₂ in NG at 4.0 MPa, with 7 wt.% PZ + 23 wt.% AMP blended solution as the absorber. Different CO₂ partial pressures (1.2 to 2.0 MPa) were used, while the CO₂ gas flow rate was consequently varied from 12 to 20 kmol/m²·h during the operation. With a fixed liquid flow rate, the L_{amine}/G_{CO_2} ratio was decreased in this study. The experimental results showed that the CO₂ removal efficiency (%) reduced from 100% to 38%, while the $K_G a_v$ reduced from 26 to 2 mol/m³·hr.kPa. The authors concluded that the decrease in the L_{amine}/G_{CO_2} ratio reduced the performance at high CO₂ concentrations due to the increase of liquid film resistance. The reduction in performance is in agreement with trends at low CO₂ partial pressure conditions.

Halim *et al.* [79] studied the influence of different operating pressures, ranging from 0.1 to 4.0 MPa, with 40% of CO₂ in the feed gas. This condition consequently varies the CO₂ partial pressure in the range of 40 to 1600 kPa. The CO₂ gas flow rate was constant at 13.27 kmol/m²·h during the operation. The CO₂ removal efficiency using the PZ + AMP blended solution was reportedly increased from 52% up to 88%, while the overall mass transfer coefficient based on mol fraction driving force ($K_G a_v$) increased from 10 to 28 kmol/m³·hr as the total column pressure increased. It was observed that only slight increments in the $K_G a_v$ were noted for the 0.1 to 2.0 MPa range, while the performance was significantly improved in the range of 2.0 to 4.0 MPa. This observation was made based on the increasing mole fraction driving force at higher pressure conditions [82]. In addition,

CO₂ solubility in the blended solution increased at higher pressure (up to 6.0 MPa) [56, 57].

A significant improvement at higher operating pressure was also reported by Tan *et al.* [94], in which CO₂ absorption from NG was conducted using 20 wt.% MEA + 40 wt.% NMP blended solution. The CO₂ partial pressure was set to range between 50 to 2500 kPa. A pilot-scale column with 0.1 to 5.0 MPa operating pressure was utilized by flowing 50% CO₂ in NG as the feed gas to the column. The CO₂ gas flow rate supplied to the system was constant in each experiment. The CO₂ removal percentage was improved from 65% to a complete removal (100%) with the increased CO₂ partial pressure. This behavior indicates a significant influence of operating pressure and CO₂ partial pressure in the packed column operation for the CO₂ absorption process.

1.6.2. Gas Flow Rates

The gas flow rates conducted in CO₂ absorption studies were mostly discussed in terms of the effect of inert gas flow rates [54, 61, 67, 70, 85, 87, 90, 91, 93, 79, 97, 98]. The effect of inert gas flow rates at atmospheric conditions in the range of 9 to 15 kPa CO₂ partial pressure was reported to be insignificant in the process [54, 85, 87, 90, 97], while some others showed a trend of decreasing performance with the gas flow rate [70, 91].

According to Xu *et al.* [90], in experimental studies using 3 kmol/m³ of DEEA as absorbent, $K_G a_v$ was nearly constant for both CO₂ partial pressures (conducted at 9 kPa and 15 kPa) when the gas flow rate was increased from 26.1 to 43.5 m³/m²·hr. The authors explained that the observed performance was due to the reaction of active amines with CO₂ molecules on the surface of the liquid film, with the changes of k_G in the gas film neglected in accounting for the $K_G a_v$ value. Thus, increasing the gas flow rate does not affect the absorption process. Ling *et al.* [67] made a similar observation in a study on CO₂ absorption into MEA + 1DMA2P blended solution at different inert gas flow rates ranging from 33.49 to 48.07 kmol/m³·hr. $K_G a_v$ was reported to be approximately 0.7 kmol/m³·hr.kPa.

Distinct behaviors of the $K_G a_v$ in two regions of gas flow rate were reported by Yan *et al.* [98]:

1. The change in $K_G a_v$ was insignificant, with the increase

in gas flow rate ranging from 20 to 37.5 kmol/m².hr. This result was due to the mass transfer being controlled by the liquid phase. Thus, any changes in the gas phase have no substantial effect on the process performance.

2. The gas flow rate increased beyond 37.5 kmol/m².hr and resulted in a significant decrease in $K_G a_v$ values. This behavior could be due to the high gas velocity, decreasing the spread of liquid on the packing surface.

Fu *et al.* reported the distinctive behavior of inert gas with different flow rates in the absorption of CO₂ in diethylenetriamine (DETA) and MEA solutions [85] at a constant CO₂ partial pressure of 15 kPa. In their experimental studies, as the inert gas flow rate increased from 25 – 45 kmol/m².hr, insignificant changes in $K_G a_v$ values were observed for both solvents due to negligible resistance in the gas phase [85]. However, a significant decrease in $K_G a_v$ from 1.9 to 0.75 kmol/m³.hr.kPa was observed with increased inert gas flow rate (24.37 to 63.54 kmol/m².hr) for the CO₂ – MEA + MeOH system [91].

Khan *et al.* [61] reported CO₂ absorption of four different blends of PZ + MDEA (2/28, 5/25, 8/22, and 10/20 wt.%/wt.%) conducted at 15 kPa of CO₂ partial pressure condition. The decreased CO₂ removal efficiency was reported for all four blends of PZ + MDEA when the gas flow rate was increased from 230.78 to 369.23 m³/m².hr. Decreased absorption efficiency from 76.86% to 68.34% was observed for a blend of 10 wt.% PZ + 20 wt.% MDEA. At higher gas flow rates in the column, the contact time between the two phases was reduced for the reaction to occur, thus resulting in lower absorption efficiency.

Besides the influence of gas flow rate at low CO₂ partial pressure conditions, CO₂ absorption has also been reported based on $K_G a_v$ values and removal efficiency at high CO₂ partial pressure conditions. Hairul *et al.* [93] performed the experimental studies for CO₂ absorption into 2 kmol/m³ of MEA solution at 1010 kPa of CO₂ partial pressure, and the process was conducted at different gas flow rates ranging between 18.89 and 35.08 kmol/m².hr. The $K_G a_v$ was observed to be minutely increased from 1.27 to 1.32 mol/m².hr.kPa, with an increased gas flow rate. This result was based on the absorption process being controlled by the liquid phase; hence changes in the gas phase left the process unaffected [93].

However, the trend was significantly different in their study of CO₂ absorption into 7 wt.% PZ + 23 wt.% AMP blended solution for a higher range of gas flow rate conducted at 1616 kPa CO₂ partial pressure [79]. The total gas flow rate varied from 33 to 51 kmol/m³.hr with variations in both CO₂ and inert (NG) flow rates. $K_G a_v$ was significantly decreased from 6.8 to 2.6 mol/m².hr.kPa in this experiment. The possible cause of the observation was due to the limited contact time for the reaction of CO₂ and amine, which resulted in lowered absorption performance [79]. The increasing CO₂ flow into the column increased the concentration of CO₂ molecules, with a limited concentration of amine molecules in the liquid phase, thus, limiting the reaction between CO₂ and amine molecules.

1.6.3. Liquid Flow Rate

Liquid flow rate can be reported as a single effect or as a ratio of liquid and gas flow rates (L/G ratio). In this study, the L/G ratio was controlled by varying the liquid flow rates with a fixed gas flow rate in the column. In a counter-current packed column, the L/G ratio is an important factor that can enhance absorption efficiency. Theoretically, the increase of driving force results from the increasing L/G ratio in the column except in the upper part of the absorption column [82]. Nevertheless, to reduce the cost of circulation and energy required for the liquid regeneration process, the liquid flow rate for the absorption process should be optimized [83, 99, 100]. A significant impact of the L/G ratio was observed in the absorption processes by Artanto *et al.* [59], Mangalapally *et al.* [84, 101], Godini and Mowla [102], Denca *et al.* [103], and Kumar *et al.* [104].

The influence of liquid flow rate on absorption has been reported by many researchers based on $K_G a_v$ values [67, 70, 74, 91, 83, 86, 90], specific absorption rate [42, 59], 76] and removal efficiency [54, 74, 105] for low CO₂ partial pressures ranging from 10 to 15 kPa. Based on the literature, increasing liquid flow rate will increase $K_G a_v$ values in a CO₂ absorption process because of the following possible reasons:

1. The process is controlled by the liquid phase, and k_L is directly proportional to $K_G a_v$ [106, 107];
2. The surface of wet packing is increased, which results in increased interfacial area (a_v) between gas and liquid [83, 86, 91, 95, 106]; and
3. The higher capacity of CO₂ is due to the increase of free amines in the system resulting in higher $K_G a_v$ values [66, 67, 91, 106, 107].

Fu *et al.* [91] reported the increase of $K_G a_v$ with an increased liquid flow rate (2.92 to 14.63 m³/m².hr) at two different concentrations of MEA – MeOH blended solution (2.5 and 5.0 kmol/m³) for CO₂ absorption at 13.4 kPa of CO₂ partial pressure. $K_G a_v$ increased from 0.3 to 3.2 kmol/m³.hr.kPa using 5.0 kmol/m³ of the solvent concentration, and $K_G a_v$ increased from 0.29 to 1.4 kmol/m³.hr.kPa using 2.5 kmol/m³ of the solvent concentration. They explained that the mass transfer was controlled by the liquid film resistance, which was reduced with increasing liquid flow rate [91]. Meanwhile, according to Ling *et al.* [67], CO₂ absorption was performed using MEA + 1DMA2P blended solution at 13.4 kPa of CO₂ partial pressure, with a liquid flow rate ranging between 2.92 and 5.85 m³/m².hr. The authors stated that the increase of $K_G a_v$ from 0.4 to 1.8 kmol/m³.hr.kPa was observed due to a greater effective contact area for the reaction at higher liquid flow rates.

Xu *et al.* [90] studied the absorption process using 3 kmol/m³ of DEEA solution for 0.1 and 0.3 mol/mol of lean CO₂ loading at different liquid flow rates (3.9 to 11.7 m³/m².hr). CO₂ absorption into DEEA was conducted at 15 kPa of CO₂ partial pressure. At higher liquid flow rates, the $K_G a_v$ for amine solution with 0.1 mol/mol CO₂ loading was slightly increased from 0.15 to 0.18 kmol/m³.hr.kPa. For the solution

with 0.3 mol/mol CO₂ loading, the highest value of K_{Ga} , was 0.13 kmol/m³.hr.kPa. Thus, CO₂ absorption at 0.1 mol/mol lean CO₂ loading with the highest K_{Ga} , value of 0.18 kmol/m³.hr.kPa was proven effective for their system.

Liao *et al.* [70] conducted experimental studies on CO₂ absorption at atmospheric pressure using MEA + DEEA blended solution. K_{Ga} , was significantly increased from 0.55 to 1.0 kmol/m³.hr.kPa, with an increasing liquid flow rate from 3.9 to 8.7 m³/m².hr. However, K_{Ga} , was observed to have a slightly decreasing trend from 1.0 to 0.9 kmol/m³.hr.kPa beyond 8.7 m³/m².hr to 11.7 m³/m².hr of liquid flow rate. The reduction of K_{Ga} , in this experiment was explained by the wall-flow phenomenon in the process [70]. In some studies, the mass transfer performance was found to be decreased at high liquid flow rates in the absorption column due to the formation of bubbles, affecting the effective surface area of the internal packing [84]. It was also reported that there was no bubble formation when the liquid flow rate ranged between 2.8 and 5.0 m³/m².hr [84].

The CO₂ absorption process was further investigated based on the effect of higher liquid flow rates on NG processing applications. Halim *et al.* [79] studied the effect of liquid flow rate on CO₂ absorption into 7 wt.% PZ + 23 wt.% AMP blended solution at 4.0 MPa and CO₂ partial pressure of 1600 kPa. The K_{Ga} , value was increased from 0.8 to 3.6 mol/m³.hr.kPa when the liquid flow rate was increased from 1.81 to 4.51 m³/m².hr. This phenomenon was also observed in their experimental study on CO₂ absorption into 2 kmol/m³ MEA solution at 1010 kPa of CO₂ partial pressure [93]. The authors reported that similar results were obtained at high CO₂ partial pressures as those found in low CO₂ partial pressures. They concluded that at higher liquid flow rates, mass transfer was increased due to the availability of more free amines to react with CO₂ molecules, leading to a reduction in liquid film resistance, which resulted in higher mass transfer performance.

1.6.4. Concentration of Amine Solution

In the past decades, numerous studies have reported that removal behavior can be affected by amine concentration. Most of the studies found that K_{Ga} , increases with increasing amine concentrations within a range of 0 – 5.0 mol/L [66, 70, 85, 91, 95, 108]. At higher amine concentrations, the availability of free active amine per unit volume is increased. This would accelerate the reaction rate between amine and CO₂ molecules. Nevertheless, at higher solvent concentrations, it will lead to an increase in solution viscosity to some extent, thereby reducing molecular diffusion rate [70, 85]. In addition, as the solvent viscosity increases, the area of the solvent spread on the surface of the packing is reduced [95].

Liao *et al.* [70] performed experimental studies using DEEA + MEA blended solution on the CO₂ absorption process at different amine concentrations. From their study, an optimal chemical concentration was observed at 2.75 kmol/m³. Increasing K_{Ga} , value from 0.55 to 1.08 kmol/m³.hr kPa was reported when the chemical concentration was increased (2.0 to 2.75 kmol/m³). Meanwhile, when the chemical concentration

was increased beyond 2.75 kmol/m³, the K_{Ga} , decreased to 0.8 kmol/m³.hr kPa.

An interaction study on MEA concentrations in the range of 3.0 – 7.0 mol/L and temperatures in the range of 303 – 323 K found that at higher MEA concentrations and temperatures, an increase of mass transfer efficiency was noted due to the domination of the kinetic effect over the viscosity effect at high MEA concentrations and temperatures [95]. The increase of MEA concentration at higher temperatures led to small increments in MEA viscosity, which resulted in less interference with the kinetic effect at increasing concentrations of MEA.

Besides that, the optimization of amine concentration is required for the absorption process, as concentration is proportional to the increase in solvent cost and corrosivity [106]. Due to the problem of corrosion in the pipelines and processing equipment, the lean-rich heat exchangers, reboiler, and strippers are primarily affected. The amine concentration used in industrial applications depends on the corrosive nature of amine-based solvents; for example, the optimum concentration for MEA was 30 wt.%, while the concentration for MDEA was limited to up to 60 wt.% [109].

In high operating pressure conditions with CO₂ partial pressure within 1000 kPa to 1600 kPa, previous research studies reported that the performance of CO₂ absorption was superior for amine concentrations in the range of 20 to 40 wt.% [79, 93]. The findings were discussed in terms of the high availability of amines for the reaction with CO₂ molecules at higher amine concentrations, thus leading to higher enhancement factors, E . The higher removal efficiency was also explained by the reduction of liquid film resistance at higher amine concentrations [79, 93].

1.6.5. Inlet Temperature of Liquid

The effect of inlet liquid temperature on CO₂ absorption process at low CO₂ partial pressures ranging between 10 to 15 kPa was studied by several researchers [54, 83, 87, 105, 95, 96, 110]. The reaction rate constant, k , is a significant parameter in the kinetics of the reaction between CO₂ and amine molecules. As the temperature increases, the k value also increases due to the higher reaction rate. Xu *et al.* [90] reported CO₂ absorption into 3 kmol/m³ of DEEA solution, where K_{Ga} , was reported to be increased when the inlet temperature was higher (273 K to 333 K). Increased mass transfer can be explained by the decrease of solvent viscosity at higher inlet liquid temperatures, resulting in higher CO₂ solubility [90].

In previous studies, K_{Ga} , was found to increase with inlet liquid temperature during CO₂ absorption into MDEA + MEA blended solution at 294-318 K [83] and diethylenetriamine (DETA) at 303-323 K [87]. In these studies, the effect of inlet liquid temperature was conducted only at three different points of temperature, specifically at 294, 303, and 318 K [83], and 303, 313, and 323 K [87]. No optimum temperature was reported in these studies. However, for CO₂ absorption into MEA solution within a range of 298 to 318 K, the optimum temperature was reported in the range of 309 to 313 K [110]. The rise of inlet liquid temperature beyond 313 K and up to

318 K induced efficiency deterioration, which reduced K_{Ga} values by 10% [110].

Besides, in studies by Liao *et al.* [70], the optimum inlet liquid temperature for CO₂ absorption in MEA + DEEA blended solution occurred at 313.15 K. The optimum temperature in their studies was explained by the reversible exothermic reaction for the absorption of CO₂ into amine solvent. Furthermore, they also stated that the increase in absorption performance as the temperature increased up to 313.15 K resulted due to the increase in absorption rate at higher inlet liquid temperatures. At this point, the mass transfer performance reached the maximum point. The reversible reaction was dominant beyond this point up to 343.15 K [70]. According to Ling *et al.* [67], CO₂ absorption into MEA + 1DMA2P blended solution increased the K_{Ga} value from 0.51 to 0.68 kmol/m³.hr.kPa when the inlet liquid temperature was increased from 293.15 K to 323.25 K. The performance was gradually reduced with the K_{Ga} value decreased to 0.61 kmol/m³.hr.kPa as the inlet liquid temperature increased to 333.15 K and was explained by reversible behavior at higher temperatures, as discussed in other studies [67, 70, 110, 111].

Apart from the influence of liquid temperature at low CO₂ partial pressures, researchers are also interested in studying the influence of inlet liquid temperature at higher operating pressures for high CO₂ partial pressures ranging from 1000 to 1600 kPa [79, 80]. Halim *et al.* [79] reported the optimum inlet liquid temperature for CO₂ absorption into 7 wt.% PZ + 23 wt.% AMP blended solution at 313 K. In their study, the increasing trend of CO₂ removal efficiency was observed when the inlet temperature was increased from 303 to 313 K due to the forward reaction being favored over the reversible reaction. However, when the inlet liquid temperature was increased beyond 313 K, the reversible reaction was favored, resulting in a decreased CO₂ removal efficiency. Besides, in experimental studies by Tan *et al.* [76], Stovent-II solvent was used for the CO₂ absorption process at 750 kPa of CO₂ partial pressure. The absorption performance was observed at different inlet liquid temperatures ranging between 308.15 and 318.15 K. The absorption performance was proven to be efficient at an inlet liquid temperature of 308.15 K. Although both inlet liquid temperatures showed 100% removal of CO₂, CO₂ removal was completed faster at 308.15 K compared to CO₂ removal at 318.15 K. It was due to the increase of inlet liquid temperature leading to the changes of solvent physical solubility, and consequently, reducing the absorption efficiency [76].

CONCLUSION AND PROSPECTS

This review discussed recent studies on CO₂ absorption at low and high CO₂ partial pressure conditions, which were mainly focused on CO₂ absorption for flue gas treatment, biogas enhancement, and natural gas processing. Based on the reviews, developing an ideal solvent is one of the focused areas to improve absorption performance. The topics of physical properties, equilibrium solubility, kinetic reaction, and mass transfer performance have been explored by many researchers and need to be considered before implementing the industrial-scale operation. Some blended solvents have been reported to

have excellent characteristics and performance; however, a lack of research studies has been identified on the regeneration energy required for the desorption process. Thermal energy is required during the regeneration process to break the bonds between CO₂ molecules and solvent molecules, which is one of the important factors to be considered because the increase in energy requirement can result in a higher operating cost of the process.

The studies of different amine-based solvents (single amine and blended amines) have been reviewed over different operating conditions involving low and high CO₂ partial pressures. The influence of operating conditions on the absorption process in packed columns has been discussed in terms of CO₂ partial pressure, gas and liquid flow rates, amine concentrations, and inlet liquid temperature. In terms of research studies at low CO₂ partial pressure conditions, the mass transfer studies were dominated by flue gas treatment with a gap in discussion for biogas as the feed gas. Biogas application requires higher CO₂ concentrations in the feed gas, producing higher CO₂ partial pressures than flue gas treatment. A high CO₂ partial pressure condition was adopted instead of NG processing, specifically for onshore and offshore operations. The depletion of conventional NG or sweet gas with low CO₂ concentration motivates the oil and gas company to explore unconventional gas with higher CO₂ concentrations (>10% CO₂).

As discussed in this paper, mass transfer is an important aspect of the CO₂-amine absorption system in which the optimum removal of CO₂ in the process can be achieved by understanding the behavior of mass transfer in a packed column. Thus, mass transfer studies in packed columns need to be explored, not limited to the lab scale, but rather extended to pilot-scale operations for a potential absorbent with excellent characteristics. The pilot-scale data are useful for scaling up the process to industrial-scale operations. On the industrial scale, energy efficiency and cost-effective processes are the focused criteria for the separation process. Therefore, more fundamental studies need to be conducted to optimize the absorption process before it can be accepted for industrial operation.

ABBREVIATIONS AND NOMENCLATURE

1DMA2P	= 1-dimethylamino-2-propanol
3DMA1P	= 3-dimethylamino-1-propanol
AEEA	= 2-((2-aminoethyl) amino)ethanol
AHPD	= Hydroxymethyl-1,3-propanediol
AMP	= 2-amino-2-methyl-1-propanol
AMPD	= 2-amino-2-methyl-1,3-propanediol
BASF	= Baden Aniline and Soda Factory
C₂H₆	= Ethane
C₃H₈	= Propane
C₄H₁₀	= Butane
CH₄	= Methane
CO₂	= Carbon dioxide

DEA	= Diethanolamine	k_y	= Mass transfer coefficient in the gas film
DEAB	= N,N-diethylaminobenzaldehyde	k_x	= Mass transfer coefficient in the liquid film
DEEA	= Diethylethanolamine	k^o_{L,a_v}	= Mass transfer coefficient for the liquid phase without chemical reactions
DETA	= Diethylenetriamine	k_{G,a_v}	= Individual volumetric mass transfer coefficient for the gas phase based on partial pressure driving force, kmol/m ³ .hr.kPa
DGA	= Diglycolamine agent	k_{y,a_v}	= Individual volumetric mass transfer coefficient for the gas phase based on unit mole fraction driving force, kmol/m ³ .hr.unit mole fraction
DIPA	= Diisopropanolamine	k_{x,a_v}	= Individual volumetric mass transfer coefficient for the liquid phase based on the unit mole fraction of driving force, kmol/m ³ .hr. unit mole fraction
DMEA	= Dimethylethanolamine	K_y	= Overall mass transfer coefficient for the gas phase based on the unit mole fraction of driving force, kmol/m ² .hr. unit mole fraction
EAE	= 2-(ethylamino)ethanol	K_G	= Overall mass transfer coefficient for the gas phase based on the partial pressure of driving force, kmol/m ² .hr.kPa
H₂	= Hydrogen	K_{y,a_v}	= Overall volumetric mass transfer coefficient for the gas phase based on the unit mole fraction of driving force, kmol/m ³ hr. unit mole fraction
H₂O	= Water	K_{G,a_v}	= Overall volumetric mass transfer coefficient for the gas phase based on the partial pressure of driving force, kmol/m ³ .hr.kPa
H₂S	= Hydrogen sulphide	m	= Slope of the equilibrium curve
HMPD	= 4-hydroxy-1-methylpiperidine	P	= Total pressure, kPa
hr	= Hour	p_A	= Partial pressure of solute A, kPa
K	= Kelvin	p_{Ai}	= Partial pressure of solute A at the interface, kPa
kPa	= Kilopascal	S	= Cross-sectional area of the column, m ²
kmol	= Kilomole	V	= Molar flow rate of gas, mol/hr
LNG	= Liquefied natural gas	y_a	= Mole fraction of component A in the bulk gas at the outlet of the column, mol/mol
MDEA	= Methyldiethanolamine	y_b	= Mole fraction of component A in the bulk gas at the inlet of the column, mol/mol
MEA	= Monoethanolamine	Z_T	= Packing height (m)
MeOH	= Methanol	CONSENT FOR PUBLICATION	
mol	= Mole	Not applicable	
m	= Meter	FUNDING	
mm	= Millimeter	The authors would like to acknowledge the Ministry of Higher Education, Malaysia (MOHE), for the research fund under the Fundamental Research Grant Scheme (FRGS/1/2018/TK02/UNIMAP/02/5). The authors are also grateful to Universiti Teknologi PETRONAS and Universiti Malaysia Perlis for funding the research activities <i>via</i> the Joint Research Project (JRP8) and (9023-00022).	
min	= Minute	CONFLICT OF INTEREST	
MORPH	= Morpholine	The authors declare no conflict of interest, financial or otherwise.	
MPa	= Megapascal	ACKNOWLEDGEMENTS	
MPDA	= m-Phenylenediamine	Declared none.	
N₂	= Nitrogen		
NG	= Natural gas		
NH₃	= Ammonia		
NMP	= N-methyl-2-pyrrolidone		
O₂	= Oxygen		
PD	= Piperidine		
PZ	= Piperazine		
PZEA	= 2-(1-piperazinyl)-ethylamine		
SHA	= Sterically hindered amine		
SO₂	= Sulfur dioxide		
SLPM	= Standard liter per minute		
T	= Temperature		
TEA	= Triethanolamine		
vol.	= Volume		
wt.	= Weight		
a_v	= Effective mass transfer area, m ² /m ³		
C_{Ai}	= Molar concentration of solute A at the interface, mol/m ³		
E	= Enhancement factor (dimensionless)		
H	= Henry's law coefficient, kPa/mol fraction		
k₂	= Second-order reaction rate constant, m ³ /kmol.s		

REFERENCES

- [1] M.D. Garba, M. Usman, S. Khan, F. Shehzad, A. Galadima, M.F. Ehsan, A.S. Ghanem, and M. Humayun, "CO₂ towards fuels: A review of catalytic conversion of carbon dioxide to hydrocarbons", *J. Environ. Chem. Eng.*, vol. 9, no. 2, p. 104756, 2021. [http://dx.doi.org/10.1016/j.jece.2020.104756]
- [2] H.H. Cho, and V. Strezov, "A Comparative Review on the Environmental Impacts of Combustion-Based Electricity Generation Technologies", *Energy Fuels*, vol. 34, no. 9, pp. 10486-10502, 2020. [http://dx.doi.org/10.1021/acs.energyfuels.0c02139]
- [3] B. Chakravarti, "S., Gupta, A., and Huneke, "Advanced Technology for the Capture of Carbon Dioxide from Flue Gases", *First Natl. Conf. Carbon Sequestration*, 2001pp. 1-11
- [4] E. Rytkebosch, M. Drouillon, and H. Vervaeren, "Techniques for transformation of biogas to biomethane", *Biomass Bioenergy*, vol. 35, no. 5, pp. 1633-1645, 2011. [http://dx.doi.org/10.1016/j.biombioe.2011.02.033]
- [5] L. Huang, C. Qing, H. Tao, Y. Wang, and X. Liu, "Experimental Study for Biogas Upgrading by Water Scrubbing under Low Pressure", *Open Chem. Eng. J.*, vol. 9, no. 1, pp. 34-38, 2015. [http://dx.doi.org/10.2174/1874123101509010034]
- [6] A. Rafiee, K.R. Khalilpour, J. Prest, and I. Skryabin, "Biogas as an energy vector", *Biomass Bioenergy*, vol. 144, p. 105935, 2021. [http://dx.doi.org/10.1016/j.biombioe.2020.105935]
- [7] N. Aryal, and T. Kvist, "Alternative of biogas injection into the Danish gas grid system—a study from demand perspective", *ChemEngineering*, vol. 2, no. 3, pp. 1-11, 2018. [http://dx.doi.org/10.3390/chemengineering2030043]
- [8] O.W. Awe, Y. Zhao, A. Nzihou, D.P. Minh, and N. Lyczko, "A Review of Biogas Utilisation, Purification and Upgrading Technologies", *Waste Biomass Valoriz.*, vol. 8, no. 2, pp. 267-283, 2017. [http://dx.doi.org/10.1007/s12649-016-9826-4]
- [9] V. Paolini, M. Torre, W. Giacomini, M. Pastori, M. Segreto, L. Tomassetti, M. Carnevale, F. Gallucci, F. Petracchini, and E. Guerriero, "CO₂/CH₄ separation by hot potassium carbonate absorption for biogas upgrading", *Int. J. Greenh. Gas Control*, vol. 83, pp. 186-194, 2019. [http://dx.doi.org/10.1016/j.ijggc.2019.02.011]
- [10] F.R.H. Abdeen, M. Mel, M.S. Jami, S.I. Ihsan, and A.F. Ismail, "A review of chemical absorption of carbon dioxide for biogas upgrading", *Chin. J. Chem. Eng.*, vol. 24, no. 6, pp. 693-702, 2016. [http://dx.doi.org/10.1016/j.cjche.2016.05.006]
- [11] N.F. Ajua Mustafa, A.M. Shariff, W.H. Tay, H.N.A. Halim, and S.M.M. Yusof, "Mass transfer performance study for CO₂ absorption into non-precipitated potassium carbonate promoted with glycine using packed absorption column", *Sustainability (Basel)*, vol. 12, no. 9, p. 3873, 2020. [http://dx.doi.org/10.3390/su12093873]
- [12] M.Z. Shahid, A.S. Maulud, M.A. Bustam, H. Suleman, H.N.A. Halim, and A.M. Shariff, "Rate-Based Modeling for Packed Absorption Column of the MEA-CO₂-Water System at High-Pressure and High-CO₂ Loading Conditions", *Ind. Eng. Chem. Res.*, vol. 58, no. 27, pp. 12235-12246, 2019. [http://dx.doi.org/10.1021/acs.iecr.9b01482]
- [13] M. Fang, N. Yi, W. Di, T. Wang, and Q. Wang, "Emission and control of flue gas pollutants in CO₂ chemical absorption system – A review", *Int. J. Greenh. Gas Control*, vol. 93, p. 102904, 2020. [http://dx.doi.org/10.1016/j.ijggc.2019.102904]
- [14] R. Kapoor, P. Ghosh, M. Kumar, and V.K. Vijay, "Evaluation of biogas upgrading technologies and future perspectives: a review", *Environ. Sci. Pollut. Res. Int.*, vol. 26, no. 12, pp. 11631-11661, 2019. [http://dx.doi.org/10.1007/s11356-019-04767-1] [PMID: 30877529]
- [15] A. Mukhtar, S. Saqib, N.B. Mellon, M. Babar, S. Rafiq, S. Ullah, M.A. Bustam, A.G. Al-Sehemi, N. Muhammad, and M. Chawla, "CO₂ capturing, thermo-kinetic principles, synthesis and amine functionalization of covalent organic polymers for CO₂ separation from natural gas : A review", *J. Nat. Gas Sci. Eng.*, vol. 77, p. 103203, 2020. [http://dx.doi.org/10.1016/j.jngse.2020.103203]
- [16] I. Sreedhar, R. Vaidhiswaran, B.M. Kamani, and A. Venugopal, "Process and engineering trends in membrane based carbon capture", *Renew. Sustain. Energy Rev.*, vol. 68, 2017, pp. 659-684. [http://dx.doi.org/10.1016/j.rser.2016.10.025]
- [17] B. Petrovic, M. Gorbounov, and S. Masoudi Soltani, "Influence of surface modification on selective CO₂ adsorption: A technical review on mechanisms and methods", *Microporous Mesoporous Mater.*, vol. 312, 2021, p. 110751.
- [18] A.I. Adnan, M.Y. Ong, S. Nomanbhay, K.W. Chew, and P.L. Show, "Technologies for biogas upgrading to biomethane: A review", *Bioengineering (Basel)*, vol. 6, no. 4, pp. 1-23, 2019. [http://dx.doi.org/10.3390/bioengineering6040092] [PMID: 31581659]
- [19] D. Flagiello, A. Parisi, A. Lancia, and F. Di Natale, *A Review on Gas-Liquid Mass Transfer Coefficients in Packed-Bed Columns*, vol. 5, 2021, no. 3, p. 43. [http://dx.doi.org/10.3390/chemengineering5030043]
- [20] L. Peters, A. Hussain, M. Follmann, T. Melin, and M.B. Hägg, "CO₂ removal from natural gas by employing amine absorption and membrane technology—A technical and economical analysis", *Chem. Eng. J.*, vol. 172, no. 2-3, pp. 952-960, 2011. [http://dx.doi.org/10.1016/j.cej.2011.07.007]
- [21] B.P. Mandal, A.K. Biswas, and S.S. Bandyopadhyay, "Absorption of carbon dioxide into aqueous blends of 2-amino-2-methyl-1-propanol and diethanolamine", *Chem. Eng. Sci.*, vol. 58, no. 18, pp. 4137-4144, 2003. [http://dx.doi.org/10.1016/S0009-2509(03)00280-X]
- [22] P.C. Chen, H.H. Cho, J.H. Jhuang, and C.H. Ku, "Selection of Mixed Amines in the CO₂ Capture Process", *C*, vol. 7, no. 1, p. 25, 2021. [http://dx.doi.org/10.3390/c7010025]
- [23] M. Caplow, "Kinetics of Carbamate Formation and Breakdown", *J. Am. Chem. Soc.*, vol. 90, no. 24, pp. 6795-6803, 1968. [http://dx.doi.org/10.1021/ja01026a041]
- [24] P.M.M. Blauwhoff, G.F. Versteeg, and W.P.M. Van Swaaij, "A study on the reaction between CO₂ and alkanolamines in aqueous solutions", *Chem. Eng. Sci.*, vol. 39, no. 2, pp. 207-225, 1984. [http://dx.doi.org/10.1016/0009-2509(84)80021-4]
- [25] S. Santos, J. Gomes, and J. Bordado, "Scale-Up Effects of CO₂ Capture by Methyl-diethanolamine (MDEA) Solutions in Terms of Loading Capacity", *Technologies (Basel)*, vol. 4, no. 3, p. 19, 2016. [http://dx.doi.org/10.3390/technologies4030019]
- [26] H. Shi, M. Huang, Q. Wu, L. Zheng, L. Cui, S. Zhang, and P. Tontiwachwuthikul, "Study of catalytic CO₂ absorption and desorption with tertiary amine DEEA and 1DMA-2p with the aid of solid acid and solid alkaline chemicals", *Molecules*, vol. 24, no. 6, p. E1009, 2019. [http://dx.doi.org/10.3390/molecules24061009] [PMID: 30871207]
- [27] T.N. Borhani, and M. Wang, "Role of solvents in CO₂ capture processes: The review of selection and design methods", *Renew. Sustain. Energy Rev.*, vol. 114, p. 109299, 2019. [http://dx.doi.org/10.1016/j.rser.2019.109299]
- [28] G. Sartori, and D.W. Savage, "Sterically Hindered Amines for CO₂ Removal from Gases", *Ind. Eng. Chem. Fundam.*, vol. 22, no. 2, pp. 239-249, 1983. [http://dx.doi.org/10.1021/i100010a016]
- [29] P. Zhang, Y. Shi, J. Wei, W. Zhao, and Q. Ye, "Regeneration of 2-amino-2-methyl-1-propanol used for carbon dioxide absorption", *J. Environ. Sci. (China)*, vol. 20, no. 1, pp. 39-44, 2008. [http://dx.doi.org/10.1016/S1001-0742(08)60005-4] [PMID: 18572520]
- [30] R.H. Weiland, N.A. Hatcher, and J.L. Nava, "Benchmarking solvents for carbon capture", In: *GPA Annual Convention Proceedings*, vol. 2, 2010, pp. 733-750.
- [31] T. Mimura, H. Simayoshi, T. Suda, M. Iijima, and S. Mituoka, "Development of energy saving technology for flue gas carbon dioxide recovery in power plant by chemical absorption method and steam system", *Energy Convers. Manage.*, vol. 38, pp. S57-S62, 1997. [http://dx.doi.org/10.1016/S0196-8904(96)00246-4]
- [32] Z.L. Ooi, P.Y. Tan, L.S. Tan, and S.P. Yeap, "Amine-based solvent for CO₂ absorption and its impact on carbon steel corrosion: A perspective review", *Chin. J. Chem. Eng.*, vol. 28, no. 5, pp. 1357-1367, 2020. [http://dx.doi.org/10.1016/j.cjche.2020.02.029]
- [33] A. Jahangiri, and M. Nabipoor Hassankiadeh, "Effects of piperazine concentration and operating conditions on the solubility of CO₂ in AMP solution at low CO₂ partial pressure", *Sep. Sci. Technol.*, vol. 54, no. 6, pp. 1067-1078, 2019. [http://dx.doi.org/10.1080/01496395.2018.1524907]
- [34] X. Chen, and G.T. Rochelle, "Aqueous piperazine derivatives for CO₂ capture: Accurate screening by a wetted wall column", *Chem. Eng. Res. Des.*, vol. 89, no. 9, pp. 1693-1710, 2011. [http://dx.doi.org/10.1016/j.cherd.2011.04.002]
- [35] S. Bishnoi, and G.T. Rochelle, "Absorption of carbon dioxide into

- aqueous piperazine: Reaction kinetics, mass transfer and solubility", *Chem. Eng. Sci.*, vol. 55, no. 22, pp. 5531-5543, 2000.
[[http://dx.doi.org/10.1016/S0009-2509\(00\)00182-2](http://dx.doi.org/10.1016/S0009-2509(00)00182-2)]
- [36] P.W.J. Derks, T. Kleingeld, C. van Aken, J.A. Hogendoorn, and G.F. Versteeg, "Kinetics of absorption of carbon dioxide in aqueous piperazine solutions", *Chem. Eng. Sci.*, vol. 61, no. 20, pp. 6837-6854, 2006.
[<http://dx.doi.org/10.1016/j.ces.2006.07.009>]
- [37] R. Rowland, Q. Yang, P. Jackson, and M. Attalla, "Amine mixtures and the effect of additives on the CO₂ capture rate", *Energy Procedia*, vol. 4, pp. 195-200, 2011.
[<http://dx.doi.org/10.1016/j.egypro.2011.01.041>]
- [38] L. Li, A.K. Voice, H. Li, O. Namjoshi, T. Nguyen, Y. Du, and G.T. Rochelle, "Amine blends using concentrated piperazine", *Energy Procedia*, vol. 37, pp. 353-369, 2013.
[<http://dx.doi.org/10.1016/j.egypro.2013.05.121>]
- [39] K. Fu, P. Zhang, and D. Fu, "Absorption capacity and CO₂ removal efficiency in tray tower by using 2-(ethylamino)ethanol activated 3-(dimethylamino)propan-1-ol aqueous solution", *J. Chem. Thermodyn.*, vol. 139, p. 105862, 2019.
[<http://dx.doi.org/10.1016/j.jct.2019.07.004>]
- [40] H. Gao, N. Wang, J. Du, X. Luo, and Z. Liang, "Comparative kinetics of carbon dioxide (CO₂) absorption into EAE, 1DMA2P and their blends in aqueous solution using the stopped-flow technique", *Int. J. Greenh. Gas Control*, vol. 94, p. 102948, 2020.
[<http://dx.doi.org/10.1016/j.ijggc.2019.102948>]
- [41] S.J. Hwang, J. Kim, H. Kim, and K.S. Lee, "Solubility of Carbon Dioxide in Aqueous Solutions of Three Secondary Amines: 2-(Butylamino)ethanol, 2-(Isopropylamino)ethanol, and 2-(Ethylamino)ethanol Secondary Alkanolamine Solutions", *J. Chem. Eng. Data*, vol. 62, no. 8, pp. 2428-2435, 2017.
[<http://dx.doi.org/10.1021/acs.jced.7b00364>]
- [42] K. Fu, P. Zhang, and D. Fu, "Experiment and model for the viscosity of carbonated 3-(dimethylamino)propan-1-ol and 2-(ethylamino)ethanol blended aqueous solutions", *J. Chem. Thermodyn.*, vol. 134, pp. 61-68, 2019.
[<http://dx.doi.org/10.1016/j.jct.2019.02.023>]
- [43] R.R. Bhosale, and V.V. Mahajani, "Kinetics of thermal degradation of renewably prepared amines useful for flue gas treatment", *J. Renew. Sustain. Energy*, vol. 5, no. 6, p. 063110, 2013.
[<http://dx.doi.org/10.1063/1.4831960>]
- [44] R. Bhosale, "CO₂ capture using aqueous ethylaminoethanol: Study of oxidative degradation", *15th Topical Conference on Gas Utilization 2015 - Topical Conference at the 2015 AIChE Spring Meeting and 11th Global Congress on Process Safety*, 2015pp. 117-127
- [45] N. Maleki, and K. Motahari, "Absorption performance of carbon dioxide in 4-Hydroxy-1-methylpiperidine + aminoethylethanolamine aqueous solutions: Experimental measurement and modeling", *J. Nat. Gas Sci. Eng.*, vol. 56, pp. 1-17, 2018.
[<http://dx.doi.org/10.1016/j.jngse.2018.05.033>]
- [46] A.T. Zoghi, F. Feyzi, and S. Zarrinpashneh, "Experimental investigation on the effect of addition of amine activators to aqueous solutions of N-methyldiethanolamine on the rate of carbon dioxide absorption", *Int. J. Greenh. Gas Control*, vol. 7, pp. 12-19, 2012.
[<http://dx.doi.org/10.1016/j.ijggc.2011.12.001>]
- [47] A. Bajpai, and M.K. Mondal, "Equilibrium solubility of CO₂ in aqueous mixtures of DEA and AEEA", *J. Chem. Eng. Data*, vol. 58, no. 6, pp. 1490-1495, 2013.
[<http://dx.doi.org/10.1021/jc3011776>]
- [48] A. Rosli, A.L. Ahmad, J.K. Lim, and S.C. Low, "Advances in liquid absorbents for CO₂ capture: A review", *J. Physiol. Sci.*, vol. 28, suppl. Suppl. 1, pp. 121-144, 2017.
[<http://dx.doi.org/10.21315/jps2017.28.s1.8>]
- [49] H. Ling, H. Gao, and Z. Liang, "Comprehensive solubility of N₂O and mass transfer studies on an effective reactive N,N-dimethylethanolamine (DMEA) solvent for post-combustion CO₂ capture", *Chem. Eng. J.*, vol. 355, pp. 369-379, 2019.
[<http://dx.doi.org/10.1016/j.cej.2018.08.147>]
- [50] M.J. Khodadadi, M. Abbasi, S. Riahi, and H. Shokrollahzadeh, "Investigation on kinetics of carbon dioxide absorption in aqueous solutions of monoethanolamine + 1, 3-diaminopropane", *Sep. Sci. Technol.*, vol. 54, no. 17, pp. 2800-2808, 2019.
[<http://dx.doi.org/10.1080/01496395.2018.1553984>]
- [51] Z. Liang, K. Fu, R. Idem, and P. Tontiwachwuthikul, "Review on current advances, future challenges and consideration issues for post-combustion CO₂ capture using amine-based absorbents", *Chin. J. Chem. Eng.*, vol. 24, no. 2, pp. 278-288, 2016.
[<http://dx.doi.org/10.1016/j.cjche.2015.06.013>]
- [52] B.S. Ali, and M.K. Aroua, "Effect of piperazine on CO₂ loading in aqueous solutions of MDEA at low pressure", *Int. J. Thermophys.*, vol. 25, no. 6, pp. 1863-1870, 2004.
[<http://dx.doi.org/10.1007/s10765-004-7740-7>]
- [53] K. Jiang, P. Feron, A. Cousins, R. Zhai, and K. Li, "Achieving Zero/Negative-Emissions Coal-Fired Power Plants Using Amine-Based Postcombustion CO₂ Capture Technology and Biomass Cocombustion", *Environ. Sci. Technol.*, vol. 54, no. 4, pp. 2429-2438, 2020.
[<http://dx.doi.org/10.1021/acs.est.9b07388>] [PMID: 31990528]
- [54] A.A. Khan, G.N. Halder, and A.K. Saha, "Experimental investigation of sorption characteristics of capturing carbon dioxide into piperazine activated aqueous 2-amino-2-methyl-1-propanol solution in a packed column", *Int. J. Greenh. Gas Control*, vol. 44, pp. 217-226, 2016.
[<http://dx.doi.org/10.1016/j.ijggc.2015.11.020>]
- [55] A.A. Khan, G. Halder, and A.K. Saha, "Kinetic effect and absorption performance of piperazine activator into aqueous solutions of 2-amino-2-methyl-1-propanol through post-combustion CO₂ capture", *Korean J. Chem. Eng.*, vol. 36, no. 7, pp. 1090-1101, 2019.
[<http://dx.doi.org/10.1007/s11814-019-0296-9>]
- [56] G. Murshid, A.M. Shariff, L.K. Keong, and M.A. Bustam, "Physical properties of aqueous solutions of piperazine and (2-amino-2-methyl-1-propanol + piperazine) from (298.15 to 333.15) K", *J. Chem. Eng. Data*, vol. 56, no. 5, pp. 2660-2663, 2011.
[<http://dx.doi.org/10.1021/jc1012586>]
- [57] G. Murshid, A.M. Shariff, M.A. Bustam, and S. Ullah, "Solubility of CO₂ in piperazine (PZ) activated aqueous solutions of 2-amino-2-methyl-1-propanol (AMP) at elevated pressures", *Appl. Mech. Mater.*, vol. 625, pp. 233-236, 2014.
[<http://dx.doi.org/10.4028/www.scientific.net/AMM.625.233>]
- [58] M.N. Hassankiadeh, and A. Jahangiri, "Application of aqueous blends of AMP and piperazine to the low CO₂ partial pressure capturing: New experimental and theoretical analysis", *Energy*, vol. 165, pp. 164-178, 2018.
[<http://dx.doi.org/10.1016/j.energy.2018.09.160>]
- [59] Y. Artanto, J. Jansen, P. Pearson, G. Puxty, A. Cottrell, E. Meuleman, and P. Feron, "Pilot-scale evaluation of AMP/PZ to capture CO₂ from flue gas of an Australian brown coal-fired power station", *Int. J. Greenh. Gas Control*, vol. 20, pp. 189-195, 2014.
[<http://dx.doi.org/10.1016/j.ijggc.2013.11.002>]
- [60] A. Sodiq, A.V. Rayer, and M.R.M. Abu-Zahra, "The kinetic effect of adding piperazine activator to aqueous tertiary and sterically-hindered amines using stopped-flow technique", *Energy Procedia*, vol. 63, pp. 1256-1267, 2014.
[<http://dx.doi.org/10.1016/j.egypro.2014.11.135>]
- [61] A.A. Khan, G.N. Halder, and A.K. Saha, "Experimental investigation on efficient carbon dioxide capture using piperazine (PZ) activated aqueous methyldiethanolamine (MDEA) solution in a packed column", *Int. J. Greenh. Gas Control*, vol. 64, pp. 163-173, 2017.
[<http://dx.doi.org/10.1016/j.ijggc.2017.07.016>]
- [62] S.H. Yeon, B. Sea, Y.I. Park, K.S. Lee, and K.H. Lee, "Absorption of carbon dioxide characterized by using the absorbent composed of piperazine and triethanolamine", *Sep. Sci. Technol.*, vol. 39, no. 14, pp. 3281-3300, 2004.
[<http://dx.doi.org/10.1081/SS-200034338>]
- [63] A. Ali, S. Zaki, and A. Barifcani, "Comprehensive evaluation and sensitivity analysis of regeneration energy for acid gas removal plant using single and activated-methyl diethanolamine solvents", *Chin. J. Chem. Eng.*, vol. 28, no. 6, pp. 1684-1693, 2020.
[<http://dx.doi.org/10.1016/j.cjche.2019.12.004>]
- [64] C. Guo, S. Chen, and Y. Zhang, "A ¹³C NMR study of carbon dioxide absorption and desorption in pure and blended 2-(2-aminoethylamine)ethanol (AEEA) and 2-amino-2-methyl-1-propanol (AMP) solutions", *Int. J. Greenh. Gas Control*, vol. 28, pp. 88-95, 2014.
[<http://dx.doi.org/10.1016/j.ijggc.2014.06.025>]
- [65] S. Mukherjee, and A.N. Samanta, "Experimental and e-NRTL model predicted VLE of CO₂ in aqueous solutions of 2-((2-aminoethyl)-amino)-ethanol and speciation study", *Fluid Phase Equilib.*, vol. 501, p. 112284, 2019.
[<http://dx.doi.org/10.1016/j.fluid.2019.112284>]
- [66] R.R. Bhosale, and V.V. Mahajani, "Kinetics of Absorption of Carbon Dioxide in Aqueous Solution of Ethylaminoethanol Modified with N-methyl-2-pyrrolidone", *Sep. Sci. Technol.*, vol. 48, no. 15, pp. 2324-2337, 2013.
[<http://dx.doi.org/10.1080/01496395.2013.805228>]

- [67] H. Ling, S. Liu, H. Gao, H. Zhang, and Z. Liang, "Solubility of N₂O, equilibrium solubility, mass transfer study and modeling of CO₂ absorption into aqueous monoethanolamine (MEA)/1-dimethylamino-2-propanol (1DMA2P) solution for post-combustion CO₂ capture", *Separ. Purif. Tech.*, vol. 232, p. 115957, 2020. [http://dx.doi.org/10.1016/j.seppur.2019.115957]
- [68] A. Samanta, and S.S. Bandyopadhyay, "Absorption of carbon dioxide into aqueous solutions of piperazine activated 2-amino-2-methyl-1-propanol", *Chem. Eng. Sci.*, vol. 64, no. 6, pp. 1185-1194, 2009. [http://dx.doi.org/10.1016/j.ces.2008.10.049]
- [69] S.K. Dash, A. Samanta, A. Nath Samanta, and S.S. Bandyopadhyay, "Absorption of carbon dioxide in piperazine activated concentrated aqueous 2-amino-2-methyl-1-propanol solvent", *Chem. Eng. Sci.*, vol. 66, no. 14, pp. 3223-3233, 2011. [http://dx.doi.org/10.1016/j.ces.2011.02.028]
- [70] H. Liao, H. Gao, B. Xu, and Z. Liang, "Mass transfer performance studies of aqueous blended DEEA-MEA solution using orthogonal array design in a packed column", *Separ. Purif. Tech.*, vol. 183, pp. 117-126, 2017. [http://dx.doi.org/10.1016/j.seppur.2017.03.064]
- [71] A. Hemmati, R. Farahzad, A. Surendar, and B. Aminahmadi, "Validation of mass transfer and liquid holdup correlations for CO₂ absorption process with methyl-diethanolamine solvent and piperazine as an activator", *Process Saf. Environ. Prot.*, vol. 126, pp. 214-222, 2019. [http://dx.doi.org/10.1016/j.psep.2019.02.030]
- [72] H. Gao, S. Liu, G. Gao, X. Luo, and Z. Liang, Hybrid behavior and mass transfer performance for absorption of CO₂ into aqueous DEEA/PZ solutions in a hollow fiber membrane contactor. *Sep. Purif. Technol.*, vol. 201, 2018, pp. 291-300. [http://dx.doi.org/10.1016/j.seppur.2018.03.027]
- [73] P. Zhang, R. Xu, H. Li, H. Gao, and Z. Liang, "Mass transfer performance for CO₂ absorption into aqueous blended DMEA/MEA solution with optimized molar ratio in a hollow fiber membrane contactor", *Separ. Purif. Tech.*, vol. 211, pp. 628-636, 2019. [http://dx.doi.org/10.1016/j.seppur.2018.10.034]
- [74] J. Gao, J. Yin, F. Zhu, X. Chen, M. Tong, W. Kang, Y. Zhou, and J. Lu, "Orthogonal test design to optimize the operating parameters of a hybrid solvent MEA-Methanol in an absorber column packed with three different packing: Sulzer BX500, Mellapale Y500 and Pall rings 16 × 16 for post-combustion CO₂ capture", *J. Taiwan Inst. Chem. Eng.*, vol. 68, pp. 218-223, 2016. [http://dx.doi.org/10.1016/j.jtice.2016.08.040]
- [75] F. Isa, H. Zabiri, M. Ramasamy, L.D. Tufa, A.M. Shariff, and S.F. Saleh, "Pressure modification index based on hydrodynamics and mass transfer effects for modeling of CO₂ removal from natural gas via absorption at high pressures", *Int. J. Greenh. Gas Control*, vol. 56, pp. 173-186, 2017. [http://dx.doi.org/10.1016/j.ijggc.2016.11.024]
- [76] L.S. Tan, K.K. Lau, M.A. Bustam, and A.M. Shariff, "Removal of high concentration CO₂ from natural gas at elevated pressure via absorption process in packed column", *J. Nat. Gas Chem.*, vol. 21, no. 1, pp. 7-10, 2012. [http://dx.doi.org/10.1016/S1003-9953(11)60325-3]
- [77] N.A.H. Hairul, A.M. Shariff, and M.A. Bustam, "Process behaviour in a packed absorption column for high pressure CO₂ absorption from natural gas using PZ + AMP blended solution", *Fuel Process. Technol.*, vol. 157, pp. 20-28, 2017. [http://dx.doi.org/10.1016/j.fuproc.2016.11.008]
- [78] N.A.H. Hairul, A.M. Shariff, and M.A. Bustam, "Mass transfer performance of 2-amino-2-methyl-1-propanol and piperazine promoted 2-amino-2-methyl-1-propanol blended solvent in high pressure CO₂ absorption", *Int. J. Greenh. Gas Control*, vol. 49, pp. 121-127, 2016. [http://dx.doi.org/10.1016/j.ijggc.2016.02.030]
- [79] H.N.A. Halim, A.M. Shariff, and M.A. Bustam, "High pressure CO₂ absorption from natural gas using piperazine promoted 2-amino-2-methyl-1-propanol in a packed absorption column", *Separ. Purif. Tech.*, vol. 152, pp. 87-93, 2015. [http://dx.doi.org/10.1016/j.seppur.2015.08.004]
- [80] L.S. Tan, A.M. Shariff, W.H. Tay, K.K. Lau, and H.N.A. Halim, "Integrated mathematical modeling for prediction of rich CO₂ absorption in structured packed column at elevated pressure conditions", *J. Nat. Gas Sci. Eng.*, vol. 28, pp. 737-745, 2016. [http://dx.doi.org/10.1016/j.jngse.2015.11.004]
- [81] O. Levenspiel, "Chemical reaction engineering", *Ind. Eng. Chem. Res.*, vol. 38, no. 11, pp. 4140-4143, 1999. [http://dx.doi.org/10.1021/ie990488g]
- [82] W. McCabe, J. C. Smith, and P. Harriott, *Unit operations of chemical engineering (McCabe, W.L., and Smith, J.L.)*, 2005.
- [83] T. Sema, A. Naami, K. Fu, M. Edali, H. Liu, H. Shi, Z. Liang, R. Idem, and P. Tontiwachwuthikul, "Comprehensive mass transfer and reaction kinetics studies of CO₂ absorption into aqueous solutions of blended MDEA-MEA", *Chem. Eng. J.*, vol. 209, pp. 501-512, 2012. [http://dx.doi.org/10.1016/j.ces.2012.08.016]
- [84] H.P. Mangalapally, R. Notz, N. Asprion, G. Sieder, H. Garcia, and H. Hasse, "Pilot plant study of four new solvents for post combustion carbon dioxide capture by reactive absorption and comparison to MEA", *Int. J. Greenh. Gas Control*, vol. 8, pp. 205-216, 2012. [http://dx.doi.org/10.1016/j.ijggc.2012.02.014]
- [85] K. Fu, T. Sema, Z. Liang, H. Liu, Y. Na, H. Shi, R. Idem, and P. Tontiwachwuthikul, "Investigation of mass-transfer performance for CO₂ absorption into diethylenetriamine (DETA) in a randomly packed column", *Ind. Eng. Chem. Res.*, vol. 51, no. 37, pp. 12058-12064, 2012. [http://dx.doi.org/10.1021/ie300830h]
- [86] A. Naami, M. Edali, T. Sema, R. Idem, and P. Tontiwachwuthikul, "Mass transfer performance of CO₂ absorption into aqueous solutions of 4-diethylamino-2-butanol, monoethanolamine, and N-methyl-diethanolamine", *Ind. Eng. Chem. Res.*, vol. 51, no. 18, pp. 6470-6479, 2012. [http://dx.doi.org/10.1021/ie2008357]
- [87] K. Fu, G. Chen, T. Sema, X. Zhang, Z. Liang, R. Idem, and P. Tontiwachwuthikul, "Experimental study on mass transfer and prediction using artificial neural network for CO₂ absorption into aqueous DETA", *Chem. Eng. Sci.*, vol. 100, pp. 195-202, 2013. [http://dx.doi.org/10.1016/j.ces.2013.04.024]
- [88] Y. Artanto, J. Jansen, P. Pearson, T. Do, A. Cottrell, E. Meuleman, and P. Feron, "Performance of MEA and amine-blends in the CSIRO PCC pilot plant at Loy Yang Power in Australia", *Fuel*, vol. 101, pp. 264-275, 2012. [http://dx.doi.org/10.1016/j.fuel.2012.02.023]
- [89] A.A. Khan, G.N. Halder, and A.K. Saha, "Carbon dioxide capture characteristics from flue gas using aqueous 2-amino-2-methyl-1-propanol (AMP) and monoethanolamine (MEA) solutions in packed bed absorption and regeneration columns", *Int. J. Greenh. Gas Control*, vol. 32, pp. 15-23, 2015. [http://dx.doi.org/10.1016/j.ijggc.2014.10.009]
- [90] B. Xu, H. Gao, X. Luo, H. Liao, and Z. Liang, "Mass transfer performance of CO₂ absorption into aqueous DEEA in packed columns", *Int. J. Greenh. Gas Control*, vol. 51, pp. 11-17, 2016. [http://dx.doi.org/10.1016/j.ijggc.2016.05.004]
- [91] K. Fu, W. Rongwong, Z. Liang, Y. Na, R. Idem, and P. Tontiwachwuthikul, "Experimental analyses of mass transfer and heat transfer of post-combustion CO₂ absorption using hybrid solvent MEA-MeOH in an absorber", *Chem. Eng. J.*, vol. 260, pp. 11-19, 2015. [http://dx.doi.org/10.1016/j.ces.2014.08.064]
- [92] Y. Liang, H. Liu, W. Rongwong, Z. Liang, R. Idem, and P. Tontiwachwuthikul, "Solubility, absorption heat and mass transfer studies of CO₂ absorption into aqueous solution of 1-dimethylamino-2-propanol", *Fuel*, vol. 144, pp. 121-129, 2015. [http://dx.doi.org/10.1016/j.fuel.2014.11.098]
- [93] H.N. Abdul Halim, "Mass transfer performance of CO₂ absorption from natural gas using monoethanolamine (MEA) in high pressure operations", *Ind. Eng. Chem. Res.*, vol. 54, no. 5, pp. 1675-1680, 2015. [http://dx.doi.org/10.1021/ie504024m]
- [94] L.S. Tan, A.M. Shariff, K.K. Lau, and M.A. Bustam, "Impact of high pressure on high concentration carbon dioxide capture from natural gas by monoethanolamine/N-methyl-2-pyrrolidone solvent in absorption packed column", *Int. J. Greenh. Gas Control*, vol. 34, pp. 25-30, 2015. [http://dx.doi.org/10.1016/j.ijggc.2014.12.020]
- [95] A. Setameteekul, A. Aroonwilas, and A. Veawab, "Statistical factorial design analysis for parametric interaction and empirical correlations of CO₂ absorption performance in MEA and blended MEA/MDEA processes", *Separ. Purif. Tech.*, vol. 64, no. 1, pp. 16-25, 2008. [http://dx.doi.org/10.1016/j.seppur.2008.09.002]
- [96] A. Dey, and A. Aroonwilas, "CO₂ absorption into MEA-AMP blend: Mass transfer and absorber height index", *Energy Procedia*, vol. 1, no. 1, pp. 211-215, 2009. [http://dx.doi.org/10.1016/j.egypro.2009.01.030]
- [97] T. Sema, A. Naami, P. Usubharatana, X. Wang, R. Gao, Z. Liang, R. Idem, and P. Tontiwachwuthikul, "Mass transfer of CO₂ absorption in

- hybrid MEA-methanol solvents in packed column", *Energy Procedia*, vol. 37, pp. 883-889, 2013.
[http://dx.doi.org/10.1016/j.egypro.2013.05.181]
- [98] S. Yan, M. Fang, W. Zhang, W. Zhong, Z. Luo, and K. Cen, "Comparative analysis of CO₂ separation from flue gas by membrane gas absorption technology and chemical absorption technology in China", *Energy Convers. Manage.*, vol. 49, no. 11, pp. 3188-3197, 2008.
[http://dx.doi.org/10.1016/j.enconman.2008.05.027]
- [99] L.S. Tan, A.M. Shariff, K.K. Lau, and M.A. Bustam, "Factors affecting CO₂ absorption efficiency in packed column: A review", *J. Ind. Eng. Chem.*, vol. 18, no. 6, pp. 1874-1883, 2012.
[http://dx.doi.org/10.1016/j.jiec.2012.05.013]
- [100] A.Y. Ibrahim, F.H. Ashour, A.O. Ghallab, and M. Ali, "Effects of piperazine on carbon dioxide removal from natural gas using aqueous methyl diethanol amine", *J. Nat. Gas Sci. Eng.*, vol. 21, pp. 894-899, 2014.
[http://dx.doi.org/10.1016/j.jngse.2014.10.011]
- [101] H.P. Mangalapally, and H. Hasse, "Pilot plant study of post-combustion carbon dioxide capture by reactive absorption: Methodology, comparison of different structured packings, and comprehensive results for monoethanolamine", *Chem. Eng. Res. Des.*, vol. 89, no. 8, pp. 1216-1228, 2011.
[http://dx.doi.org/10.1016/j.cherd.2011.01.013]
- [102] H.R. Godini, and D. Mowla, "Selectivity study of H₂S and CO₂ absorption from gaseous mixtures by MEA in packed beds", *Chem. Eng. Res. Des.*, vol. 86, no. 4, pp. 401-409, 2008.
[http://dx.doi.org/10.1016/j.cherd.2007.11.012]
- [103] C. Dinca, N. Slavu, and A. Badea, "Benchmarking of the pre/post-combustion chemical absorption for the CO₂ capture", *J. Energy Inst.*, vol. 91, no. 3, pp. 445-456, 2018.
[http://dx.doi.org/10.1016/j.joei.2017.01.008]
- [104] S.K. Dash, A.N. Samanta, and S.S. Bandyopadhyay, "Simulation and parametric study of post combustion CO₂ capture process using (AMP+PZ) blended solvent", *Int. J. Greenh. Gas Control*, vol. 21, pp. 130-139, 2014.
[http://dx.doi.org/10.1016/j.ijggc.2013.12.003]
- [105] Q. Zeng, Y. Guo, and Z. Niu, "Experimental studies on removal capacity of carbon dioxide by a packed reactor and a spray column using aqueous ammonia", *Energy Procedia*, vol. 4, pp. 519-524, 2011.
[http://dx.doi.org/10.1016/j.egypro.2011.01.083]
- [106] K. Maneeintr, R.O. Idem, P. Tontiwachwuthikul, and A.G.H. Wee, "Comparative mass transfer performance studies of CO₂ absorption into aqueous solutions of DEAB and MEA", *Ind. Eng. Chem. Res.*, vol. 49, no. 6, pp. 2857-2863, 2010.
[http://dx.doi.org/10.1021/ie900540v]
- [107] A. Aroonwilas, and P. Tontiwachwuthikul, "Mass Transfer Coefficients and Correlation for CO₂ Absorption into 2-Amino-2-methyl-1-propanol (AMP) Using Structured Packing", *Ind. Eng. Chem. Res.*, vol. 37, no. 2, pp. 569-575, 1998.
[http://dx.doi.org/10.1021/ie970482w]
- [108] W.J. Choi, J.B. Seo, S.Y. Jang, J.H. Jung, and K.J. Oh, "Removal characteristics of CO₂ using aqueous MEA/AMP solutions in the absorption and regeneration process", *J. Environ. Sci. (China)*, vol. 21, no. 7, pp. 907-913, 2009.
[http://dx.doi.org/10.1016/S1001-0742(08)62360-8] [PMID: 19862955]
- [109] A.L. Kohl, and R.B. Nielsen, *Gas purification*, 5th ed. Gulf Publ. Co., 1997.
[http://dx.doi.org/10.1016/B978-088415220-0/50009-4]
- [110] A. Aroonwilas, P. Tontiwachwuthikul, and A. Chakma, "Effects of operating and design parameters on CO₂ absorption in columns with structured packings", *Separ. Purif. Tech.*, vol. 24, no. 3, pp. 403-411, 2001.
[http://dx.doi.org/10.1016/S1383-5866(01)00140-X]
- [111] Q. Zeng, Y. Guo, Z. Niu, and W. Lin, "Mass transfer coefficients for CO₂ absorption into aqueous ammonia solution using a packed column", *Ind. Eng. Chem. Res.*, vol. 50, no. 17, pp. 10168-10175, 2011.
[http://dx.doi.org/10.1021/ie101821b]